



SK ESD Technologies Limited

Add: No. 10, Guanhong Road, High-tech Industrial Development Zone,
Luogang District, Guangzhou, Guangdong, China.

Contact: Ms. Kifen Wu

Mobile: +86-158 1700 4780

Tel: 0086-20-3203 8501

Fax: 0086-20-3203 8500

Email: kifen@skesd.com

Website: www.skesd.cn



SK ESD Technologies Limited

01	LEAN PIPE SERIES	
	Coated Pipe -----	P01-02
	Aluminum Pipe -----	P03-04
02	ROLLER TRACK SERIES	
	Galvanized Roller Track -----	P05-07
	Aluminum Roller Track -----	P08-10
03	COATED PIPE JOINT SERIES	
	H Series -----	P11-16
	HJ Series -----	P17-22
04	ALUMINUM PIPE JOINT SERIES	
	Aluminum Pipe Joint -----	P23-29
05	PLACON MOUNT SERIES	
	Placon Mount -----	P30-40
06	AUXILIARY COMPONENTS SERIES	
	Metal Auxiliary Components for Coated Pipe -----	P41-43
	Adjuster -----	P44
	Plastic Auxiliary Components -----	P45-46
	Screw & Nuts -----	P47
	Metal Auxiliary Components for Aluminum Pipe -----	P48-50
07	CASTER SERIES	
	Caster -----	P51-54
08	BOARDS & SHEETS SERIES	
	ESD Curtain & Mats -----	P55-56
	Sheets -----	P57-58
09	APPLICATION	
	Application -----	P59-60

2003

SK ESD Technologies Limited — Leading industry manufacturer and supplier in lean systems established in 2003. We provide superior quality products in lean pipe, metal joints, roller tracks and others.

2011

In 2011, our R&D department in joint efforts with our professional team developed an advanced production, creating a new workshop that occupied an area of 4000 m². Here we expanded the production adding PE coated pipe and ABS coated pipe.

2012

With the growth of the electronic industry and rising demand from our customers, it was essential for our business to rapidly increase the production and created another production line of metal joints and roller tracks now covering a factory area of 10,000m²

2018

To remain competitive in the global market and provide solutions to our customers in a timely manner we established an overseas warehouse, located in Thailand.

2019

In 2019 SK ESD Technologies successfully consolidates as one of the leading manufacturers in lean system components with high standards of production. Now the company increased its workforce having two major factories covering an area of 20,000 m² with a team of 130 staffs.

2020


With the international presence of SK ESD Technologies and to reach in a more effective way the customers of North and South America, the company establishes a sales branch located in Chile.



SK STRENGTHS

- INNOVATION**
We have a strong R&D department where we are continuously developing new products to exceed customers expectations and to anticipate to their future challenges.
- EXCELLENCE**
We have high standards that are followed by our team of professionals with years of experience. Our excellency is applied and monitored to every step of the client’s process since the first contact until the products are delivered, following up by an after-sales service. Always ensuring our client is 100% satisfied.
- CAPACITY**
We have a major warehouse of 1000m²for stocking the products of greater demand of our customers so that we can meet rush orders and prevent that our customers may be out of stock.
- FLEXIBILITY**
We are known for being flexible and adapting ourselves to all the requirements that our clients may need. We are focused in continuous improvement and we established an overseas warehouse in order to have a better connection and efficient service.
- RESPONSIBILITY**
We take responsibility for the entire process and results. Our customers are the most important key element in the success of our business, so we take each of their requests and workclosely with them to deliver the best product.

Coated Lean Pipe Series

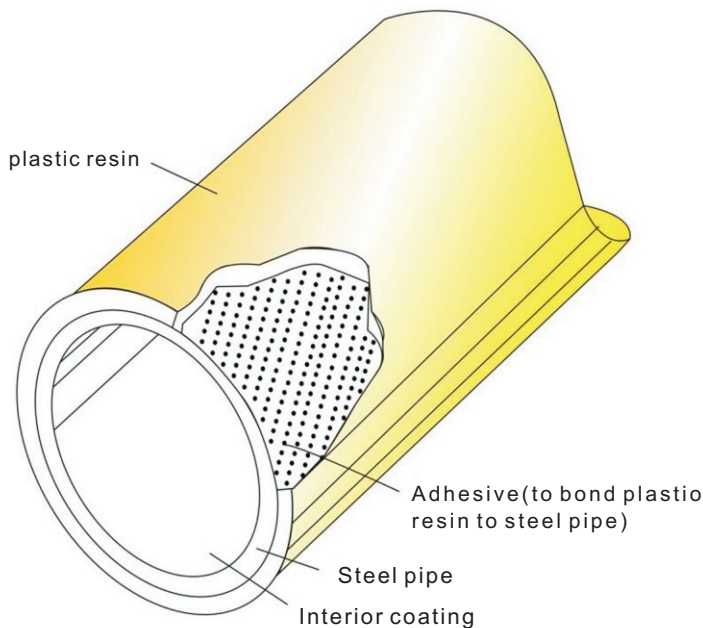

PE Coated Pipe Sk701

- Material: SPCC Steel + PE coated
- Diameter: $27.8 \pm 0.2\text{mm}$
- Thickness: 0.8-2.0mm
- Color: Beige, Ivory, White, Green or customized
- Length: 4 meters or customized



ABS Coated Pipe Sk711

- Material: SPCC Steel + ABS coated
- Diameter: $27.8 \pm 0.2\text{mm}$
- Thickness: 0.8-2.0mm
- Color: Beige, Ivory, White, Green or customized
- Length: 4 meters or customized



ECO Pipe Sk721

- Material: SPCC Steel pipe + Surface coated
- Diameter: 27.4-27.6mm or customized
- Thickness: 1.0/1.2mm or customized
- Color: Grey, Black or customized
- Length: 4 meters or customized
- Surface resistance: $10e6-9\Omega$



Stainless Steel Pipe SK-731


- Material: Stainless Steel 201, 304, 316
- Diameter: $27.8 \pm 0.2\text{mm}$ or customized
- Thickness: 0.8-1.5mm or customized
- Color: Silver
- Length: 4 meters or customized



Aluminum Lean Pipe Series


Aluminum Lean Pipe SK-760

- Material: Aluminum
- Diameter: $28.0 \pm 0.2\text{mm}$
- Thickness: 1.2mm
- Length: 4 meters or customized
- Surface Treatment: Sand blasting or Silver anodizing

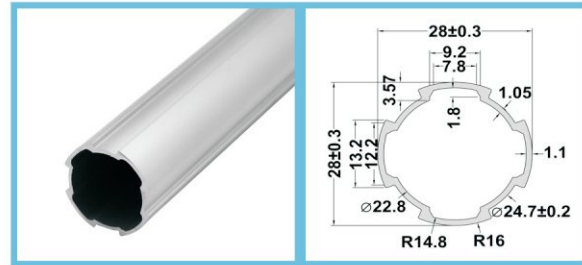


Aluminum Lean Pipe SK-761

- Material: Aluminum
- Diameter: $28.0 \pm 0.2\text{mm}$
- Thickness: 1.7mm
- Length: 4 meters or customized
- Surface Treatment: Sand blasting or Silver anodizing

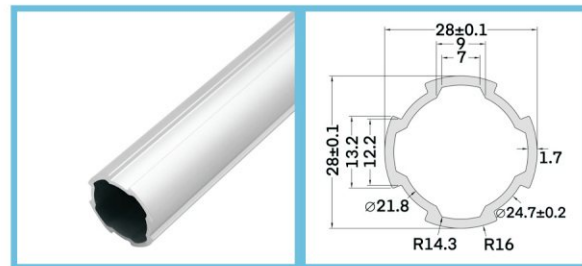


Aluminum Lean Pipe SK-762

- Type: T Slot
- Material: Aluminum
- Diameter: $28.0 \pm 0.2\text{mm}$
- Length: 4 meters or customized
- Surface Treatment: Sand blasting or Silver anodizing

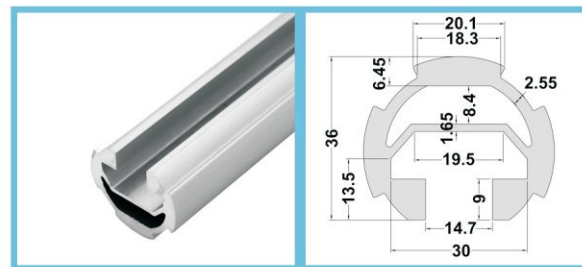


Aluminum Lean Pipe SK-763

- Type: L Flat
- Material: Aluminum
- Diameter: $28.0 \pm 0.2\text{mm}$
- Thickness: 1.7mm
- Length: 4 meters or customized
- Surface Treatment: Sand blasting or Silver anodizing

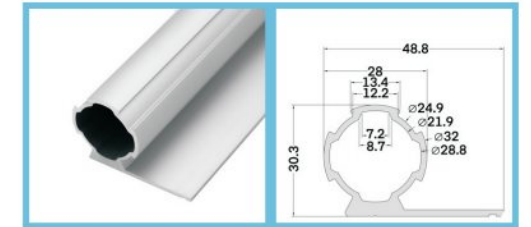


Aluminum Lean Pipe SK-764

- Type: L Flat
- Material: Aluminum
- Diameter: $28.0 \pm 0.2\text{mm}$
- Thickness: 1.7mm
- Length: 4 meters or customized
- Surface Treatment: Sand blasting or Silver anodizing

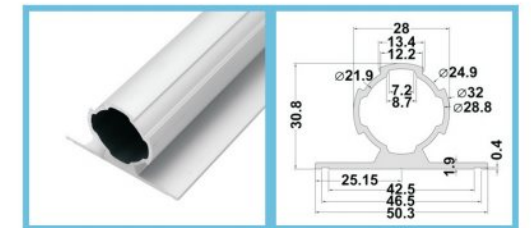


Aluminum Lean Pipe SK-765

- Type: Heavy Duty & Double
- Material: Aluminum
- Diameter: $28.0 \pm 0.2\text{mm}$
- Thickness: 1.7mm
- Length: 4 meters or customized
- Surface Treatment: Sand blasting or Silver anodizing

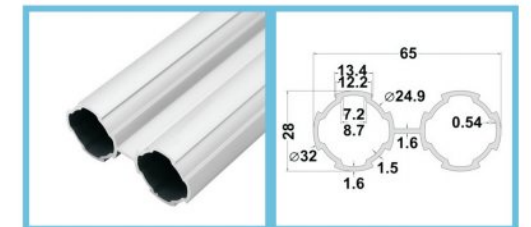


Aluminum Lean Pipe SK-766

- Type: Extra Heavy Duty
- Material: Aluminum
- Diameter: $28.0 \pm 0.2\text{mm}$
- Thickness: 1.7mm
- Length: 4 meters or customized
- Surface Treatment: Sand blasting or Silver anodizing

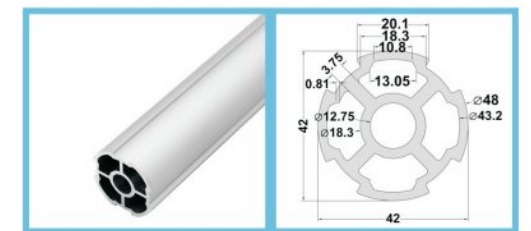


Roller Track Series


SK-11A

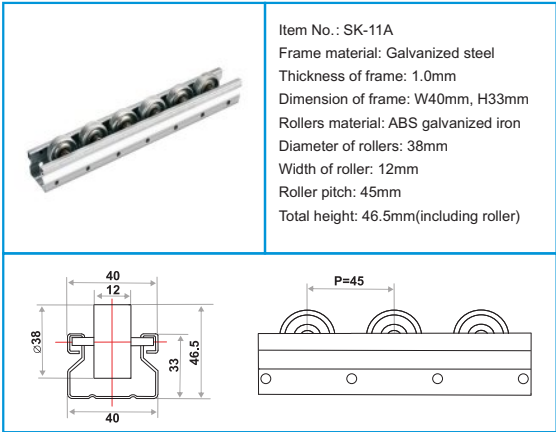


SK-11B

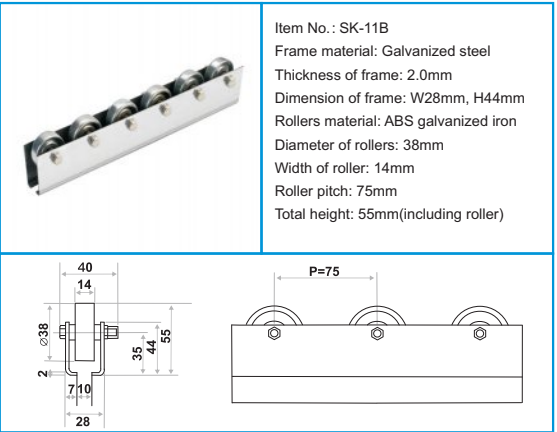


SK-40

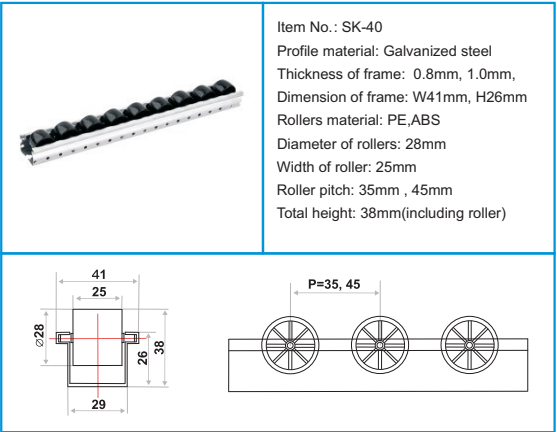


SK-40A

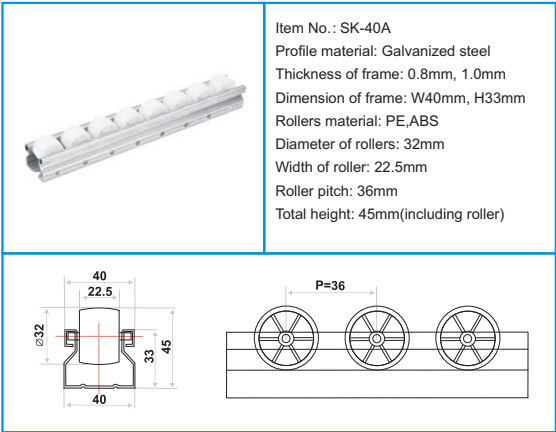


SK-12A

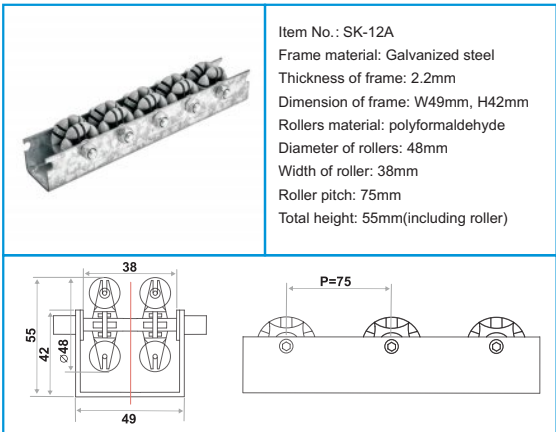


SK-12B

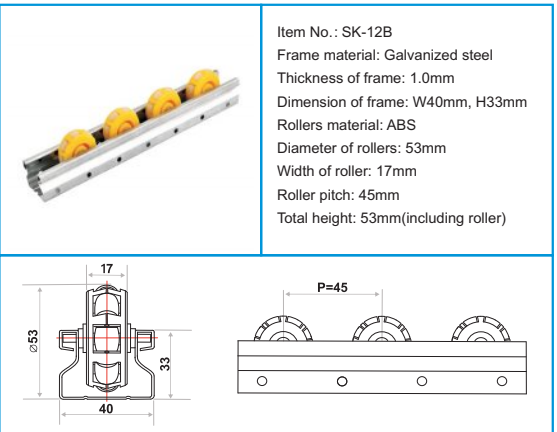


SK-40B

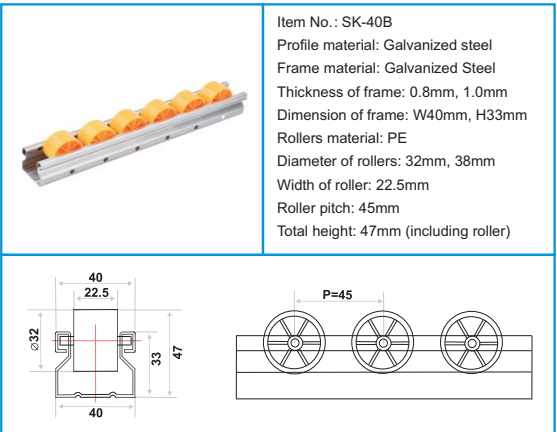


SK-40C

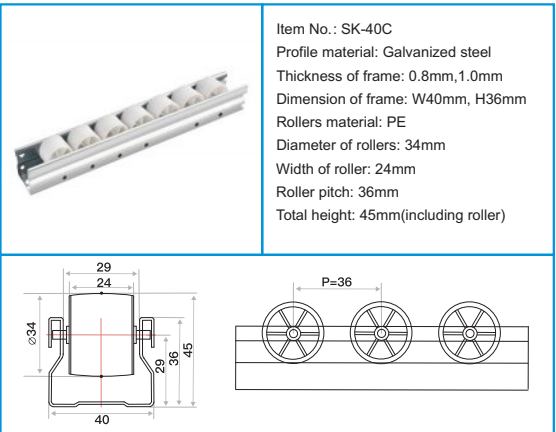


SK-35

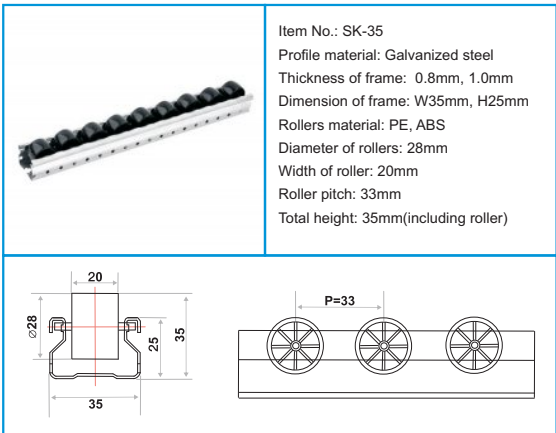


SK-35A

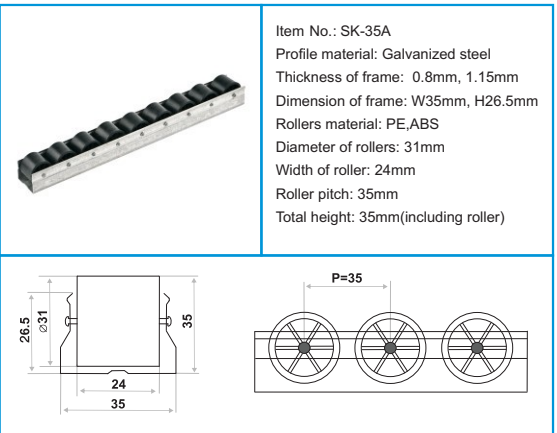

SK-40G

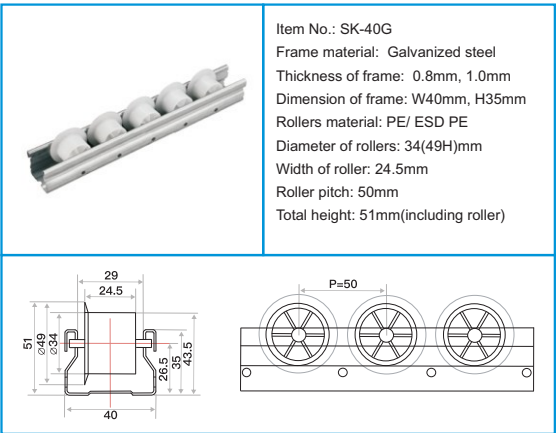

SK-44

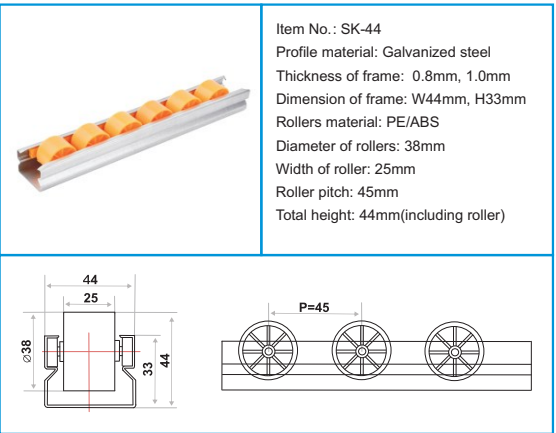



02

Roller Track Series

SK-60A





Item No.: SK-60A
Profile material: Galvanized steel
Thickness of frame: 0.8mm, 1.0mm
Dimension of frame: W60mm, H33mm
Rollers material: PE
Diameter of rollers: 30mm
Width of roller: 42mm
Roller pitch: 36mm
Total height: 44mm(including roller)

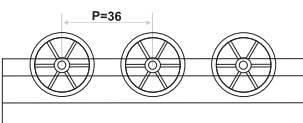


SK-60B





Item No.: SK-60B
Profile material: Galvanized steel
Thickness of frame: 0.8mm, 1.0mm
Dimension of frame: W60mm, H25mm
Rollers material: PE
Diameter of rollers: 15mm
Width of roller: 42mm
Roller pitch: 16mm
Total height: 30mm(including roller)



SK-85A-R





Item No.: SK-85A-R
Frame material: Galvanized steel
Thickness of frame: 0.8mm
Dimension of frame: W85mm, H27.5mm
Rollers material: PE
Diameter of rollers: 32mm
Width of roller: 69mm
Roller pitch: 25mm
Total height: 43.5mm(including roller)

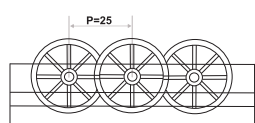

SK-AL-30





Item No.: SK-AL-30
Frame material: Aluminum alloy
Thickness of frame: 1.2mm, 1.4mm
Dimension of frame: W30mm, H22mm
Rollers material: PE
Diameter of rollers: 13mm
Width of roller: 14mm
Roller pitch: 15mm, 30mm
Total height: 24mm(including roller)

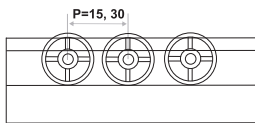

SK-72B





Item No.: SK-72B
Frame material: Galvanized steel
Thickness of frame: 0.8mm, 1.0mm
Dimension of frame: W72mm, H36mm
Rollers material: PE
Diameter of rollers: 34mm
Width of roller: 54mm
Roller pitch: 42mm
Total height: 44mm(including roller)

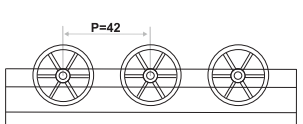

SK-72C





Item No.: SK-72C
Frame material: Galvanized steel
Thickness of frame: 0.8mm, 1.0mm
Dimension of frame: W72mm, H38mm
Rollers material: PE
Diameter of rollers: 18mm
Width of roller: 55mm
Roller pitch: 20mm
Total height: 42mm(including roller)



SK-AL-35





Item No.: SK-AL-35
Frame material: Aluminum alloy
Thickness of frame: 1.4mm
Dimension of frame: W35mm, H29mm
Rollers material: PE, ABS
Diameter of rollers: 28mm
Width of roller: 20mm
Roller pitch: 30mm, 45mm
Total height: 38mm(including roller)

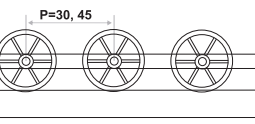

SK-AL-38A





Item No.: SK-AL-38A
Frame material: Aluminum alloy
Thickness of frame: 1.4mm
Dimension of frame: W38mm, H35mm
Rollers material: PE, ABS
Diameter of rollers: 32mm
Width of roller: 22mm
Roller pitch: 41mm
Total height: 44mm(including roller)

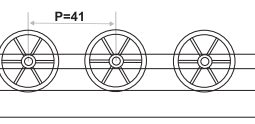

SK-80-R





Item No.: SK-80-R
Frame material: Galvanized steel
Thickness of frame: 0.8mm
Dimension of frame: W80mm, H27.5mm
Rollers material: PE
Diameter of rollers: 34mm
Width of roller: 58mm
Roller pitch: 40mm
Total height: 44.5mm(including roller)

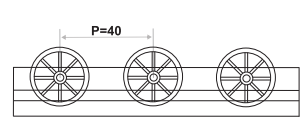

SK-85





Item No.: SK-85
Frame material: Galvanized steel
Thickness of frame: 1.0mm, 1.2mm
Dimension of frame: W85mm, H33mm
Rollers material: PE
Diameter of rollers: 45mm
Width of roller: 55mm
Roller pitch: 50mm
Total height: 50mm(including roller)



SK-AL-40E





Item No.: SK-AL-40E
Frame material: Aluminum alloy
Thickness of frame: 1.4mm
Dimension of frame: W40mm, H35mm
Rollers material: PE
Diameter of rollers: 35mm
Width of roller: 25mm
Roller pitch: 39mm
Total height: 44mm(including roller)

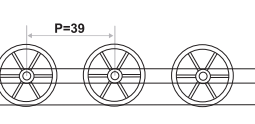

SK-AL-40H




Item No.: SK-AL-40H
Frame material: Aluminum alloy
Thickness of frame: 1.7mm
Dimension of frame: W40mm, H45mm
Rollers material: ABS
Diameter of rollers: 18mm
Width of roller: 16mm
Roller pitch: 28mm
Total height: 48.8mm(including roller)

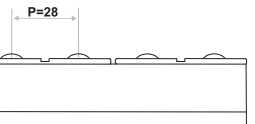

Roller Track Series


SK-AL-40I

Item No.: SK-AL-40I
Frame material: Aluminum alloy
Thickness of frame: 1.7mm
Dimension of frame: W40mm, H45mm
Rollers material: ABS
Diameter of rollers: 18mm
Width of roller: 16mm
Roller pitch: 28mm
Total height: 55mm(including roller)

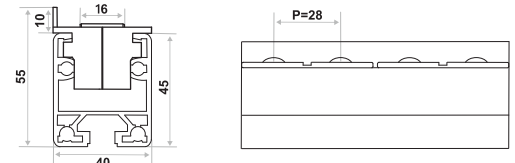


SK-AL-42A

Item No.: SK-AL-42A
Profile material: Galvanized steel
Thickness of frame: 1.2mm, 1.45mm
Dimension of frame: W41mm, H35mm
Rollers material: PE/ABS
Diameter of rollers: 28mm
Width of roller: 25mm
Roller pitch: 30mm, 45mm, 60mm
Total height: 38.5mm(including roller)

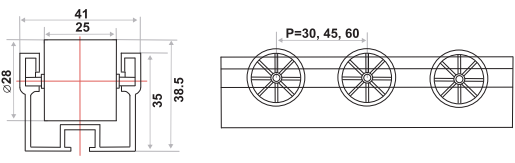


SK-AL-44B

Item No.: SK-AL-44B
Frame material: Aluminum alloy
Thickness of frame: 1.4mm
Dimension of frame: W44mm, H38mm
Rollers material: PE/ABS
Diameter of rollers: 38mm
Width of roller: 25mm
Roller pitch: 45mm
Total height: 48mm(including roller)

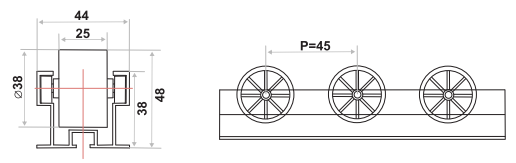


SK-ALD-44E

Item No.: SK-ALD-44E
Frame material: Aluminum alloy
Thickness of frame: 1.4mm
Dimension of frame: W44mm, H33 or 54mm
Rollers material: ABS
Diameter of rollers: 37mm
Width of roller: 25mm
Roller pitch: 44mm
Total height: 44mm(including roller)

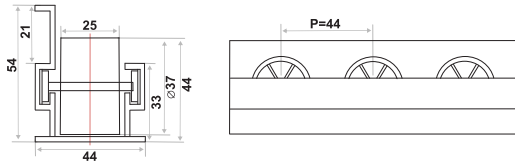


SK-ALD-42A

Item No.: SK-ALD-42A
Frame material: Aluminum alloy
Thickness of frame: 1.2mm, 1.45mm
Dimension of frame: W41mm, H35mm
Rollers material: PE/ABS
Diameter of rollers: 28(38H)mm
Width of roller: 25mm
Roller pitch: 45mm, 60mm
Total height: 38.5mm(including roller)

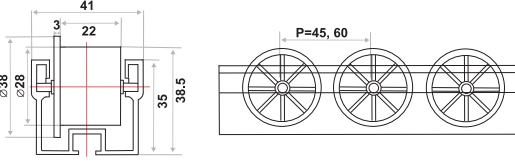


SK-AL-42B

Item No.: SK-AL-42B
Frame material: Aluminum alloy
Thickness of frame: 1.1mm, 1.2mm, 1.45mm
Dimension of frame: W41mm, H35mm
Rollers material: PE/ABS
Diameter of rollers: 28mm
Width of roller: 25mm
Roller pitch: 30mm, 45mm, 60mm
Total height: 42.5mm(including roller)

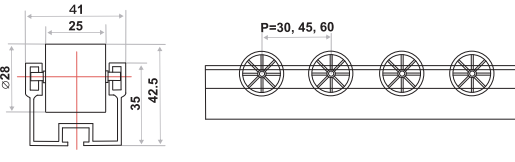


SK-AL-60C

Item No.: SK-AL-60C
Frame material: Aluminum alloy
Thickness of frame: 1.5mm
Dimension of frame: W60mm, H35mm
Rollers material: PE
Diameter of rollers: 30mm
Width of roller: 44mm
Roller pitch: 36mm
Total height: 42mm(including roller)

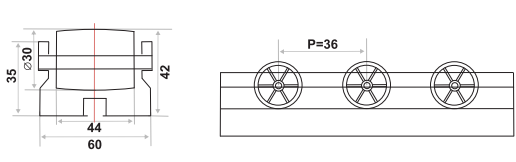


SK-AL-70

Item No.: SK-AL-70
Frame material: Aluminum alloy
Thickness of frame: 1.3mm
Dimension of frame: W70mm, H15mm
Rollers material: PE
Diameter of rollers: 13mm
Width of roller: 14mm
Roller pitch: 15mm, 30mm, 45mm
Total height: 16mm(including roller)

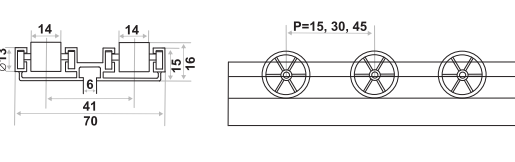


SK-ALD-42B

Item No.: SK-ALD-42B
Frame material: Aluminum alloy
Thickness of frame: 1.1mm, 1.2mm, 1.45mm
Dimension of frame: W41mm, H35mm
Rollers material: PE/ABS
Diameter of rollers: 28 (38H)mm
Width of roller: 25mm
Roller pitch: 45mm, 60mm
Total height: 42.5mm(including roller)

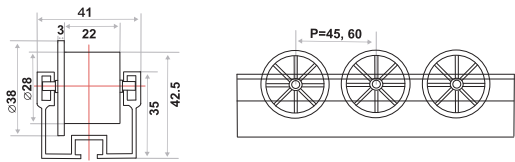


SK-AL-44A

Item No.: SK-AL-44A
Frame material: Aluminum alloy
Thickness of frame: 1.4mm
Dimension of frame: W44mm, H33mm
Rollers material: PE/ABS
Diameter of rollers: 38mm
Width of roller: 25mm
Roller pitch: 45mm
Total height: 44mm(including roller)

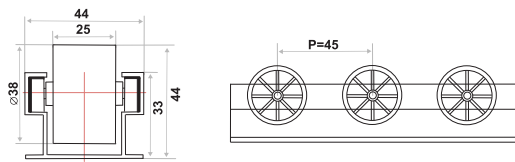


SK-AL-72A

Item No.: SK-AL-72A
Frame material: Aluminum alloy
Thickness of frame: 1.4mm
Dimension of frame: W72mm, H35mm
Rollers material: PE
Diameter of rollers: 34mm
Width of roller: 54mm
Roller pitch: 41mm
Total height: 42mm(including roller)

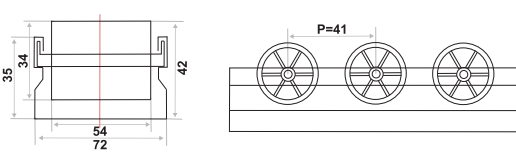





SK-PVC-44

Item No.: SK-PVC-44
Frame material: PVC
Thickness of frame: 1.4mm
Dimension of frame: W48mm, H87mm
Rollers material: PE
Diameter of rollers: 37mm
Width of roller: 25mm
Roller pitch: 41mm
Total height: 87mm(including roller)








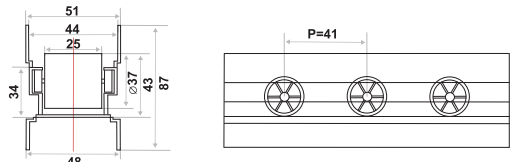


03

Coated Pipe Joint H Series

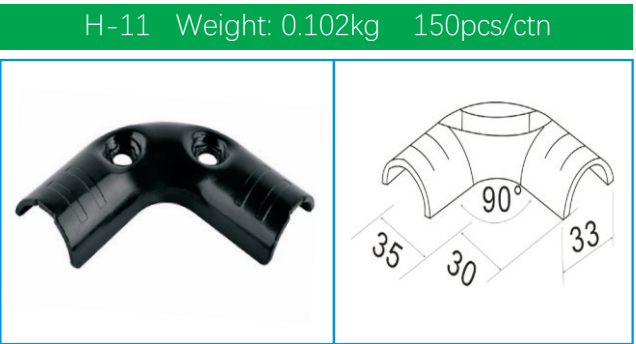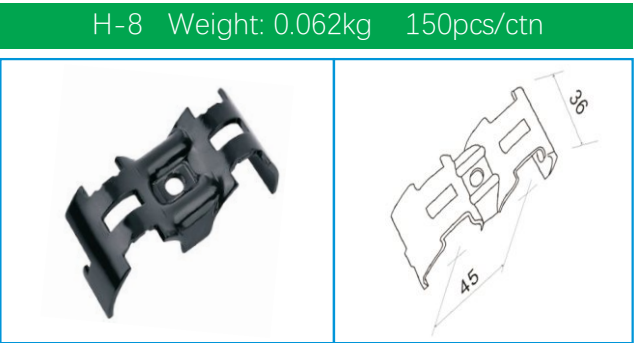
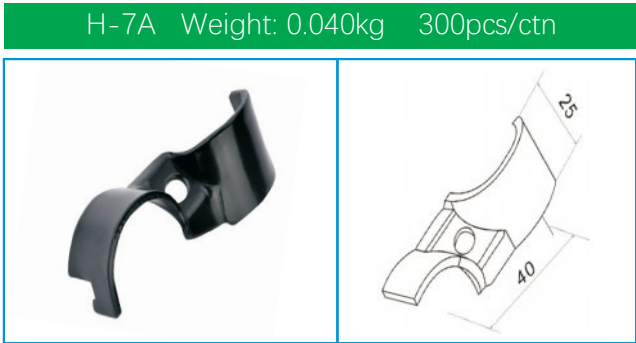
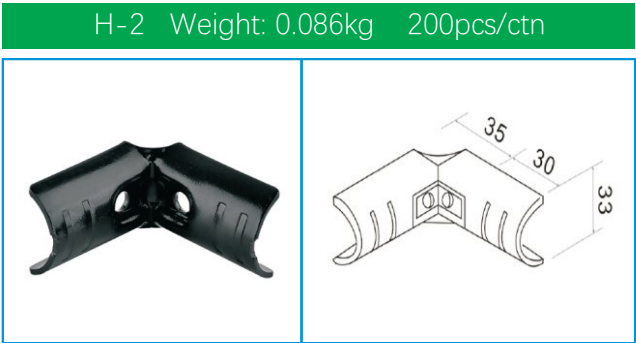


Coated Pipe Joint H Series









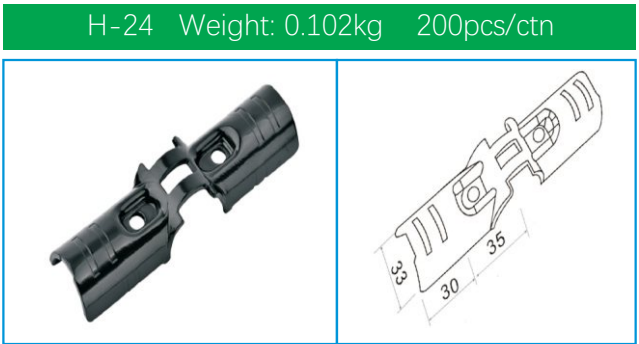
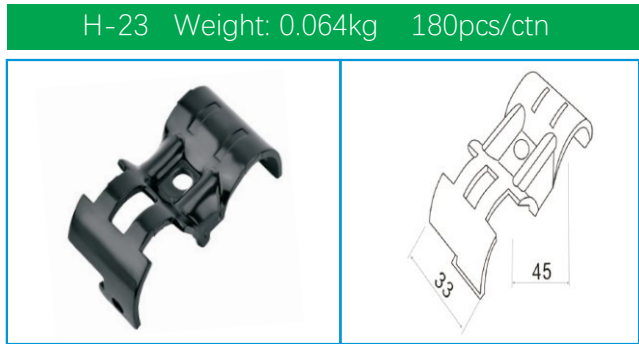
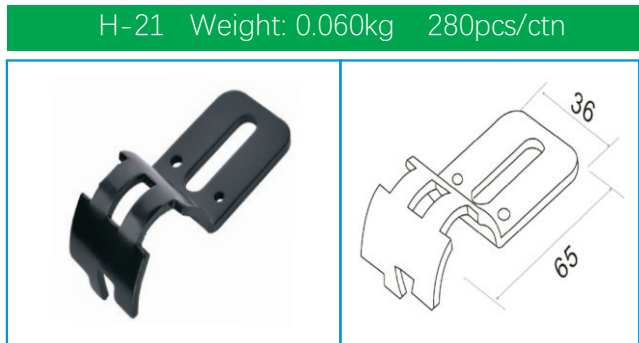
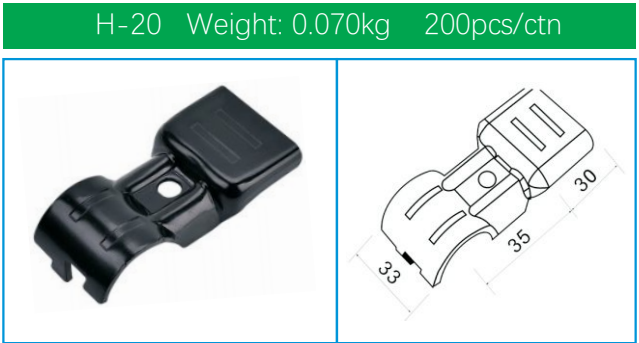
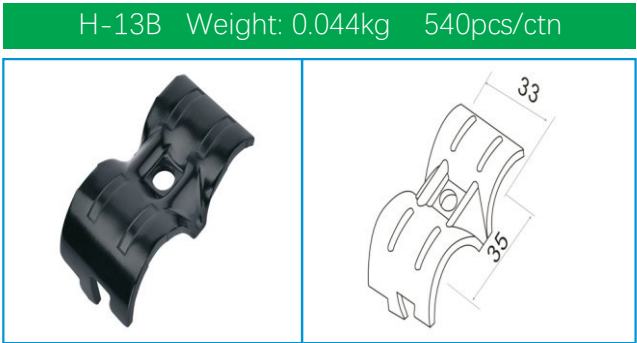
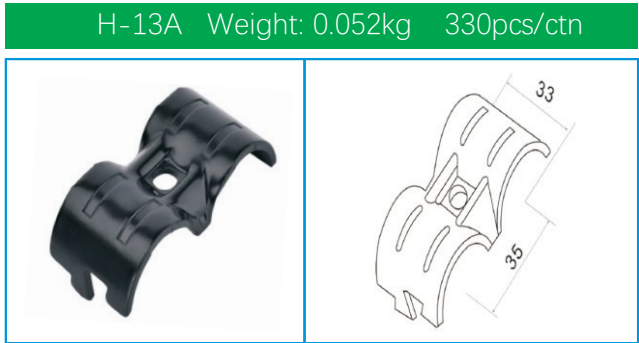
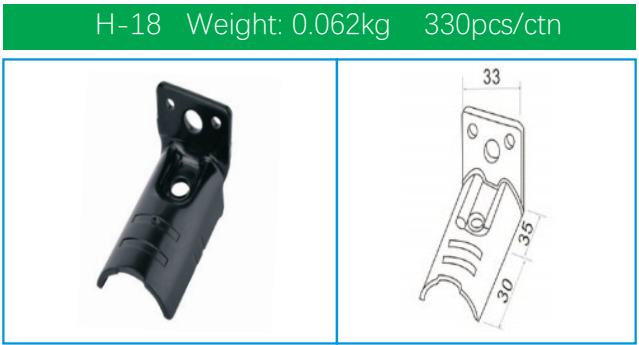
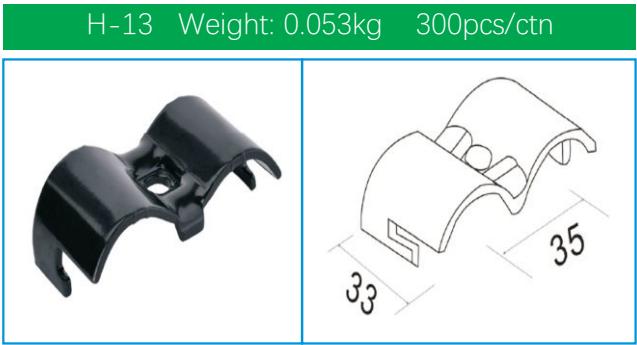


03

Coated Pipe Joint H Series













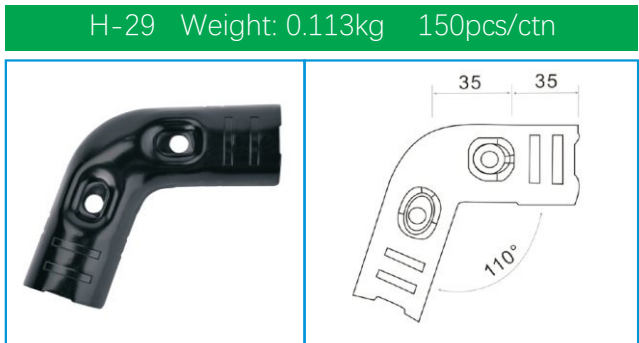
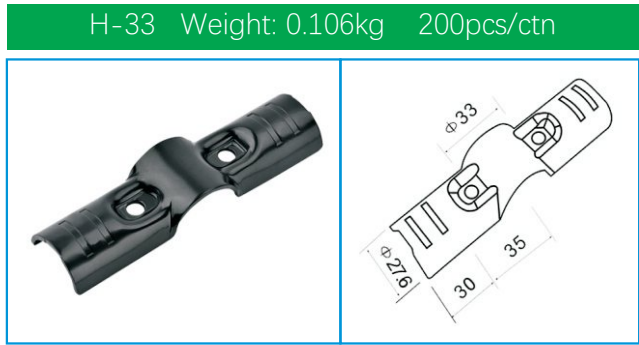
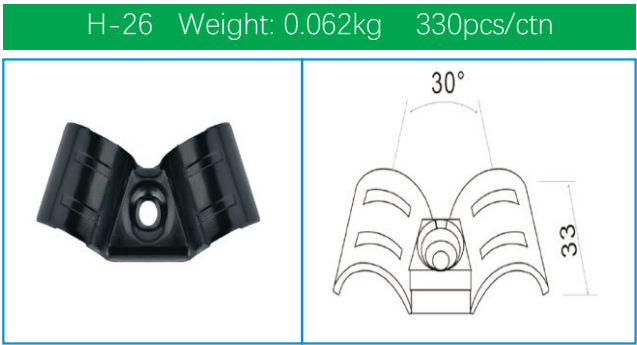


Coated Pipe Joint HJ Series

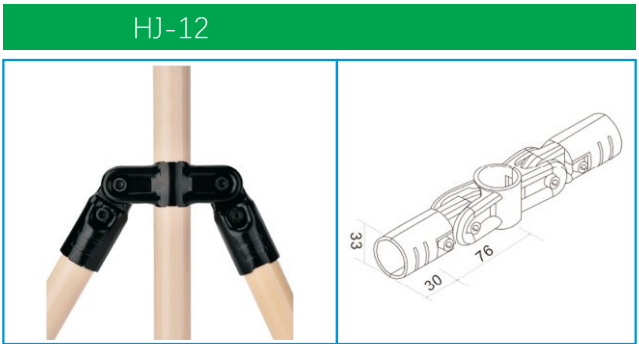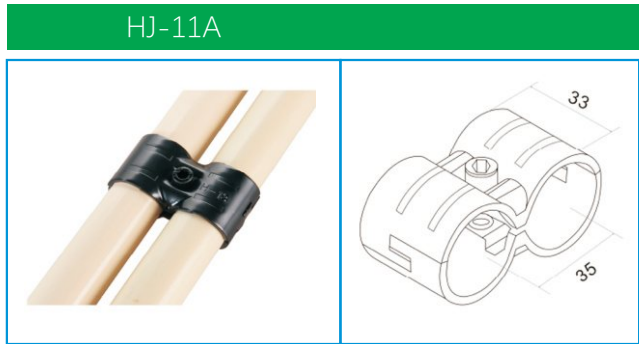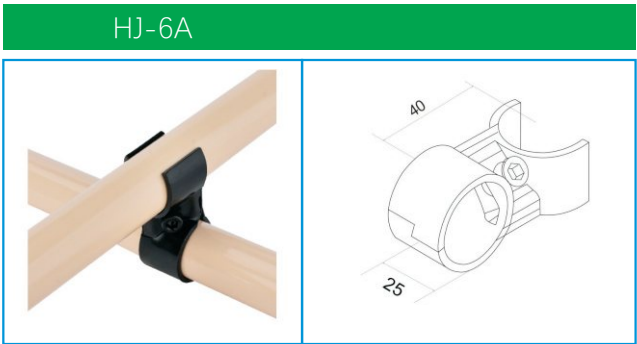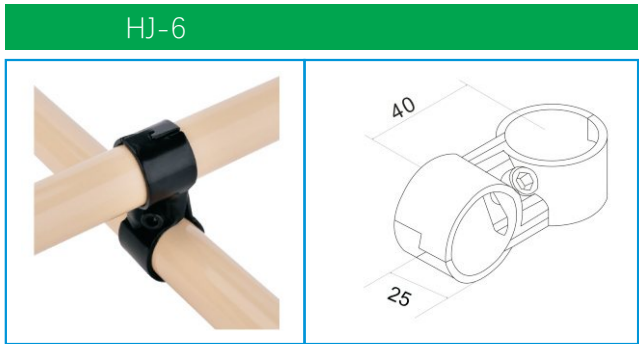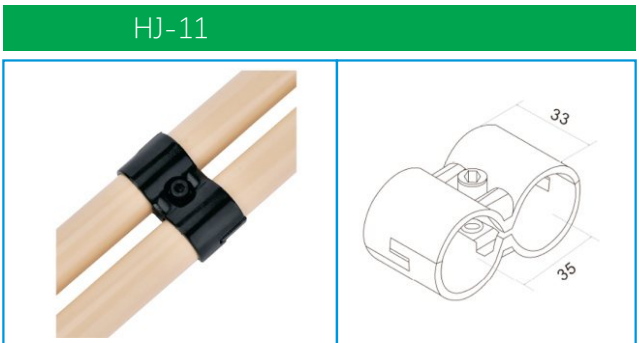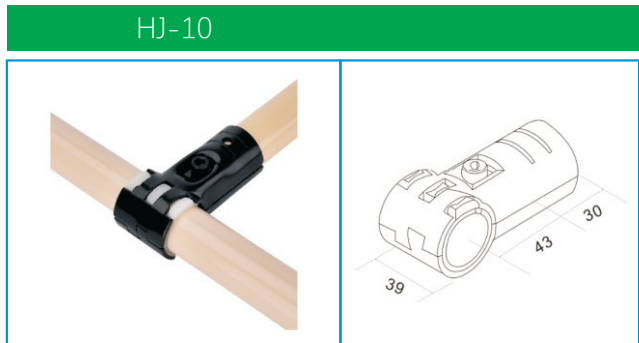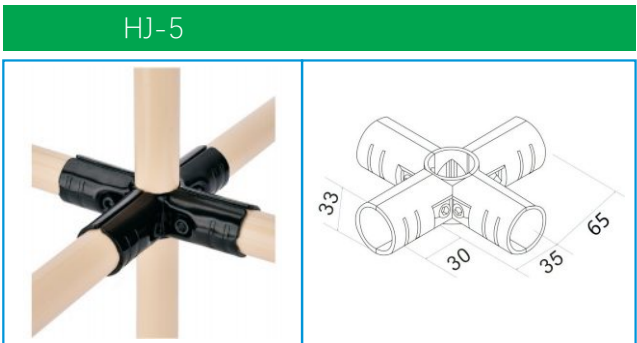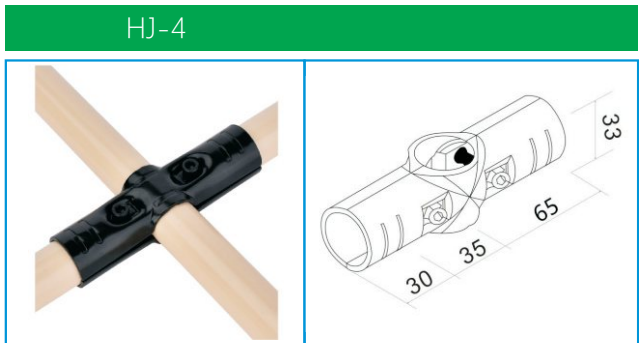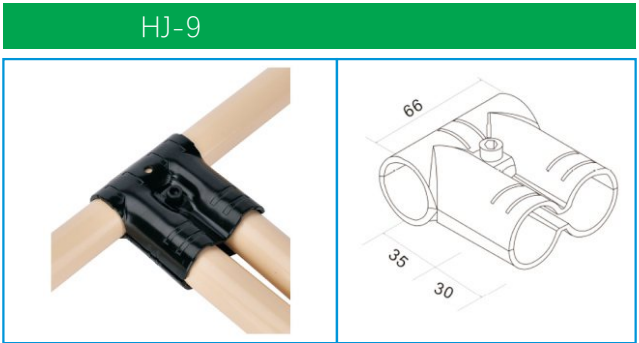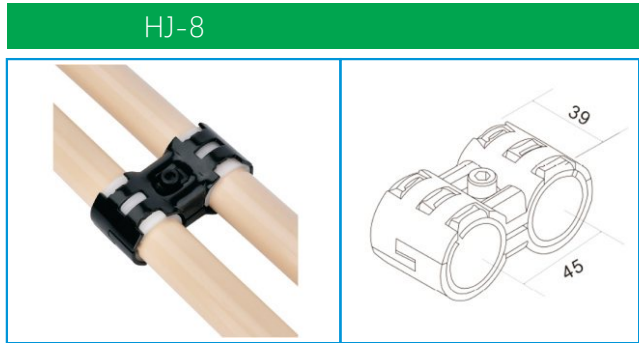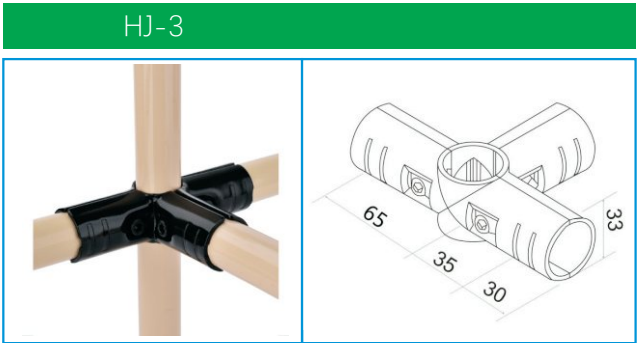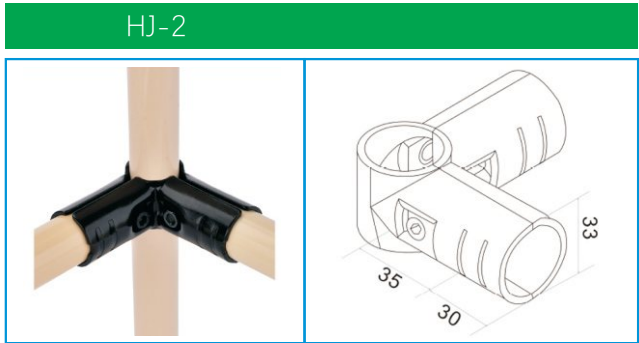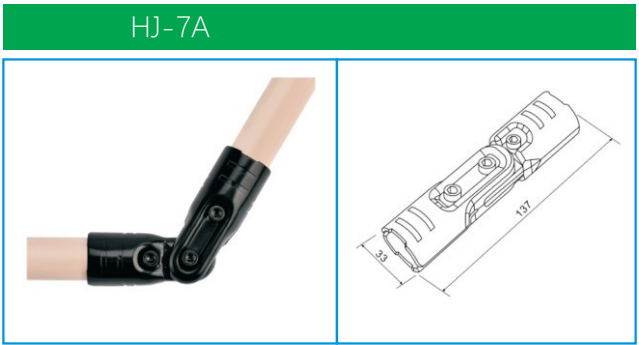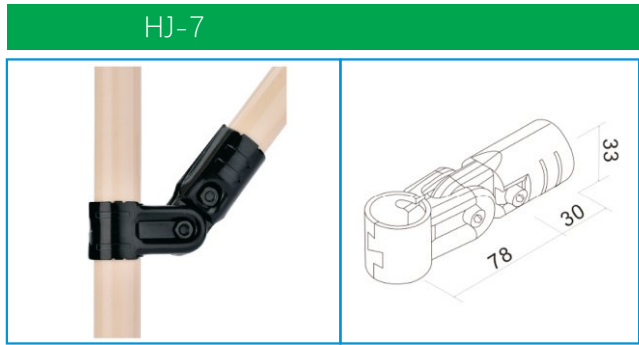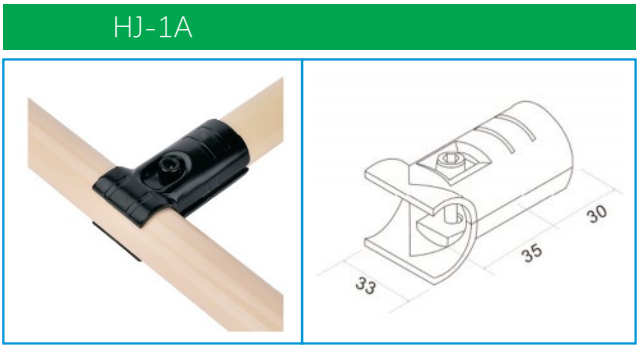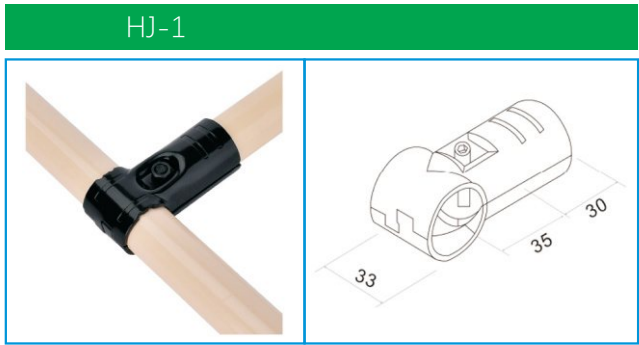
















03

Coated Pipe Joint HJ Series

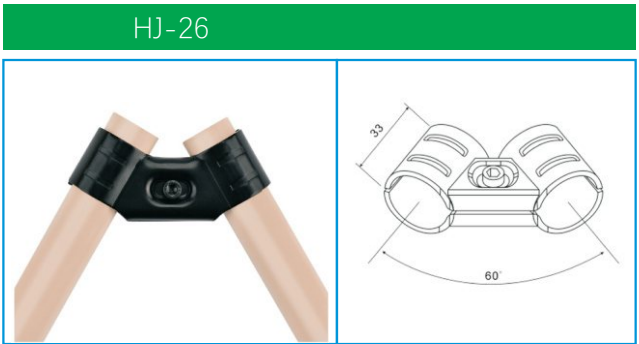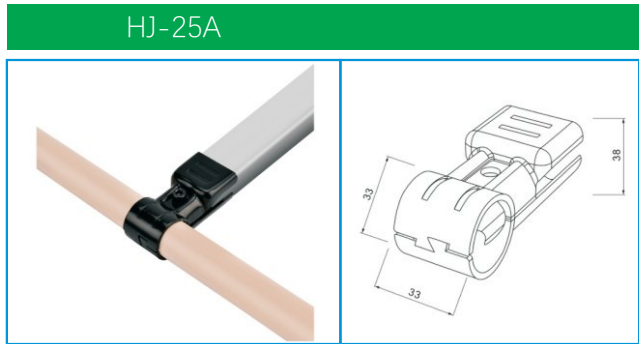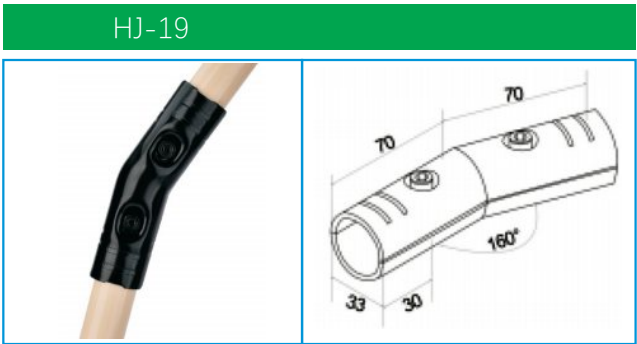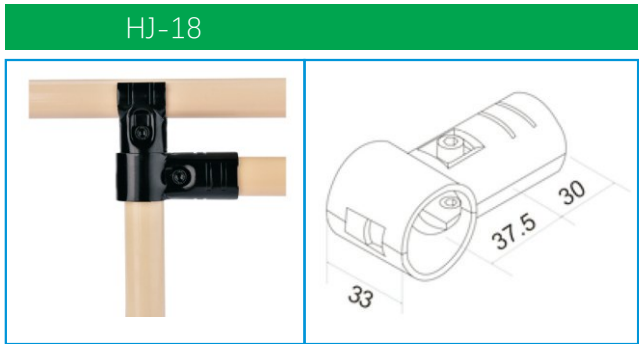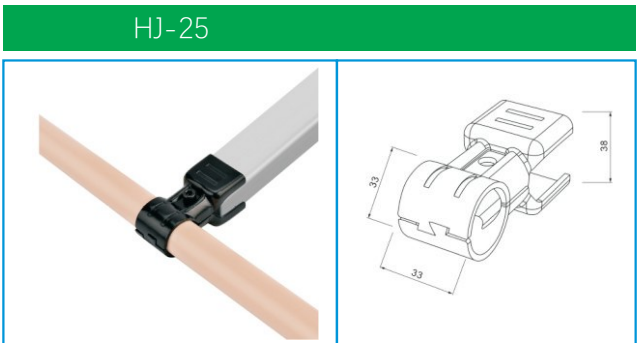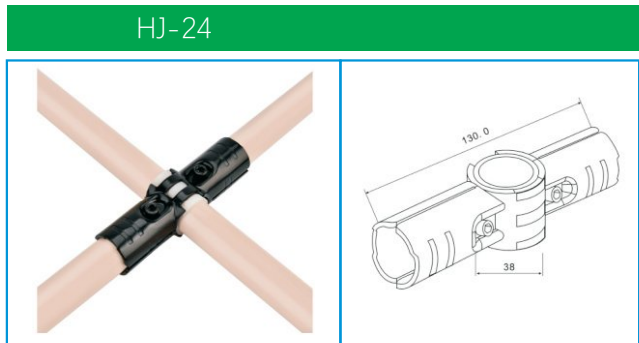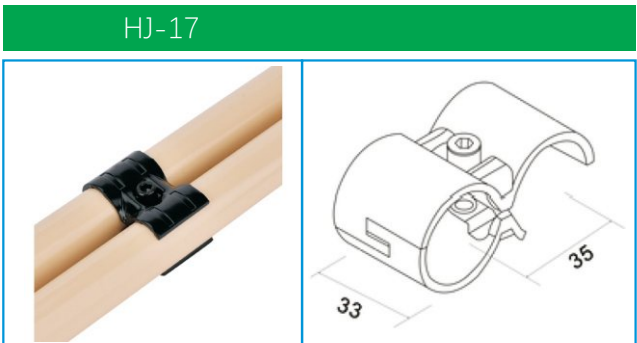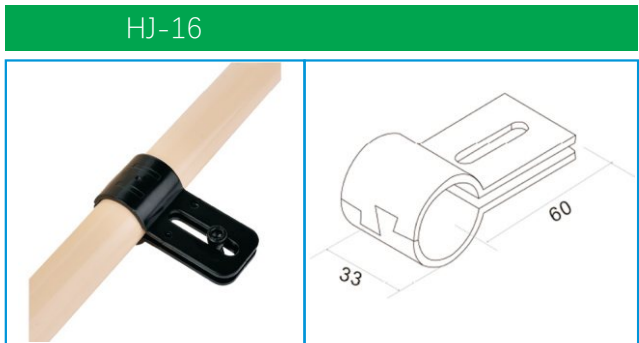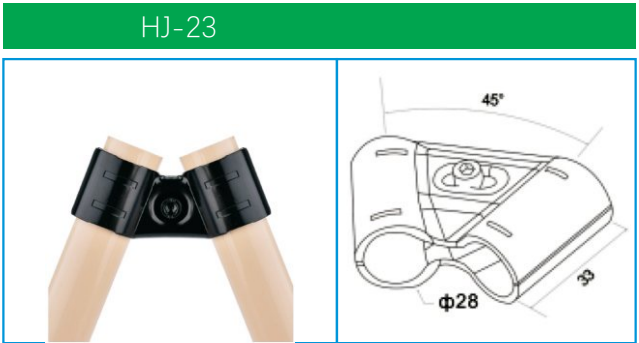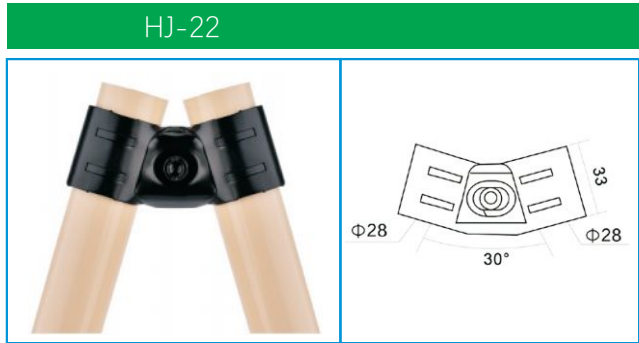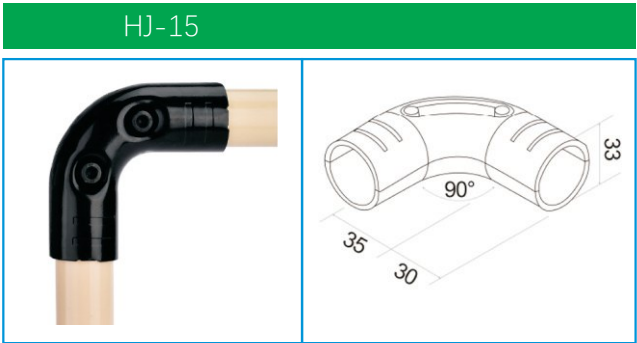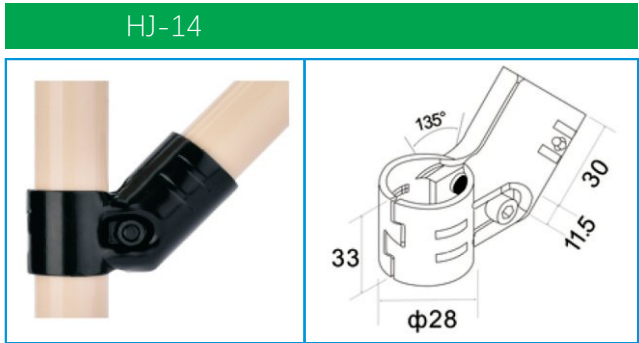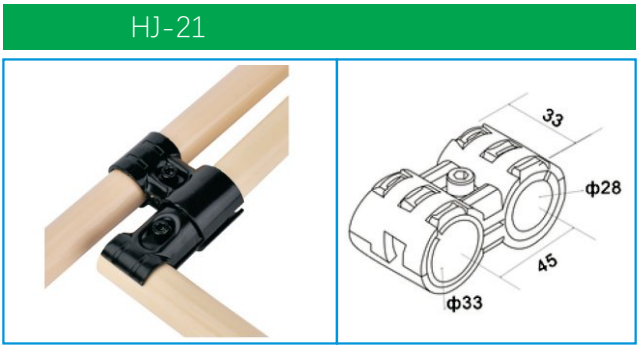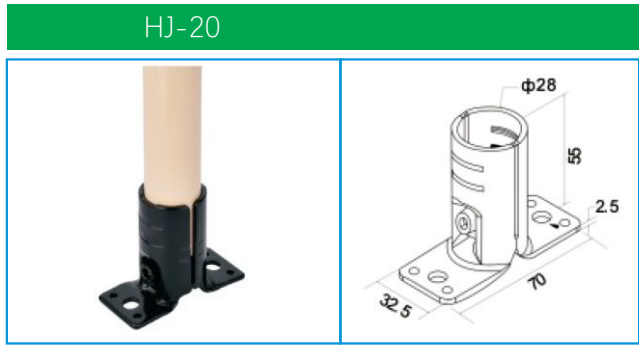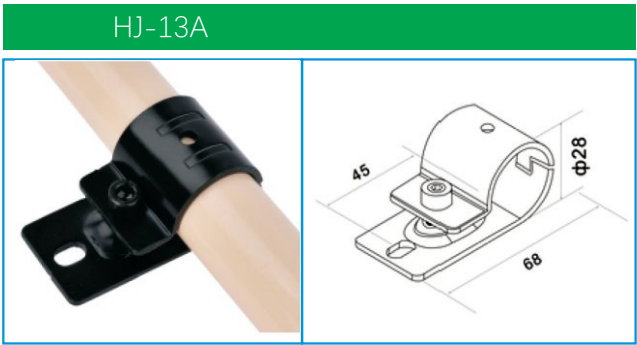


03

Coated Pipe Joint HJ Series

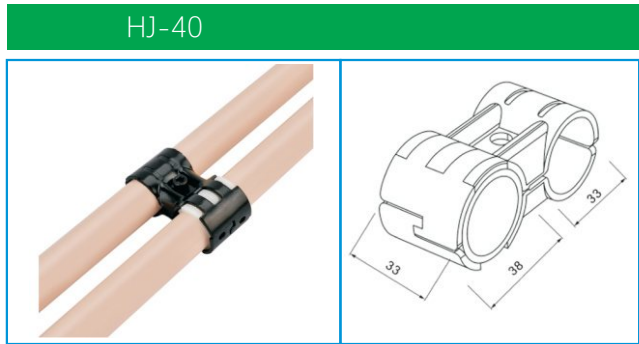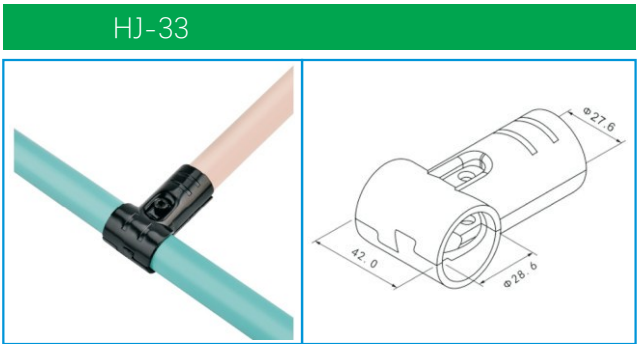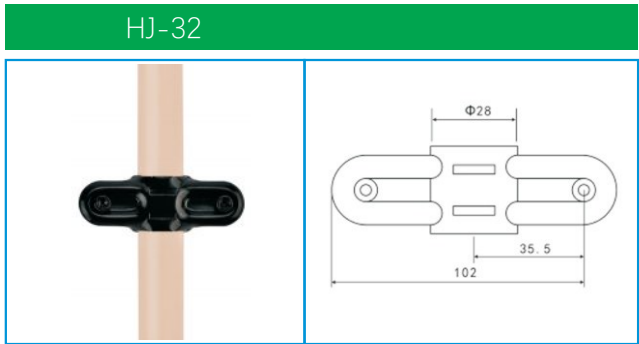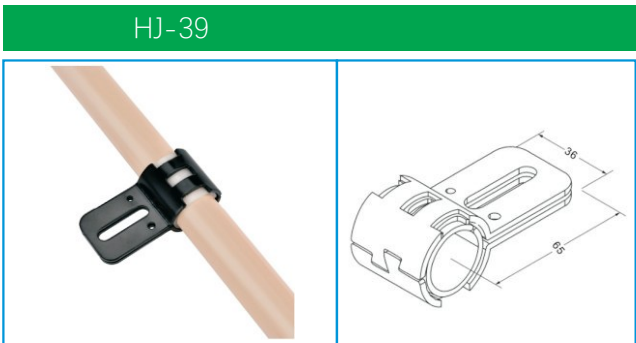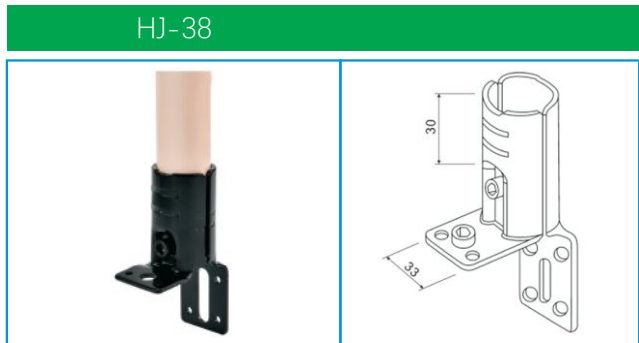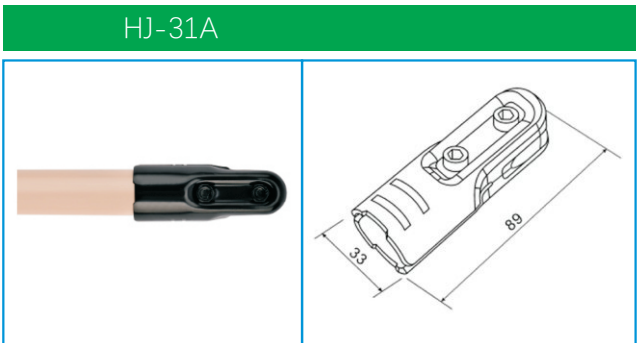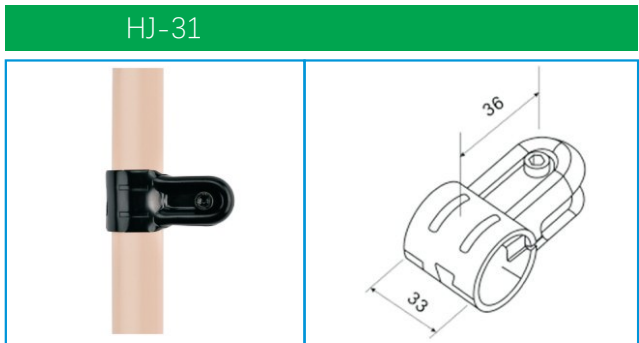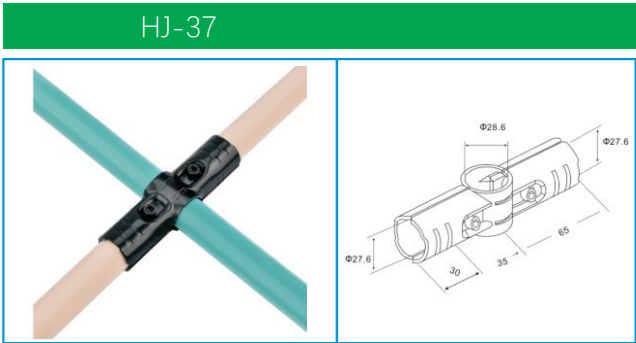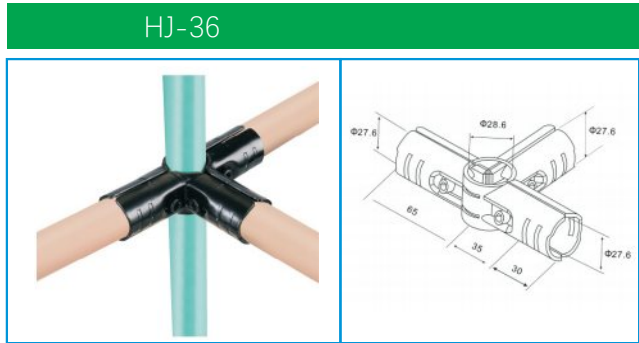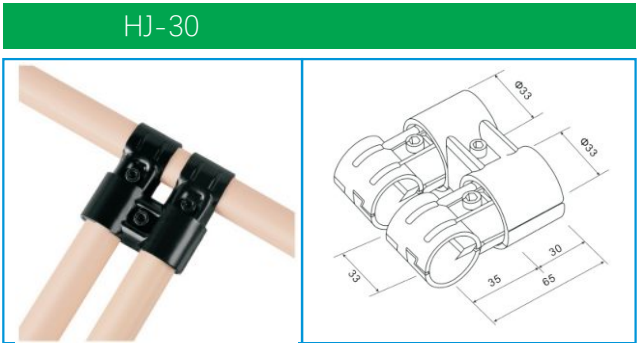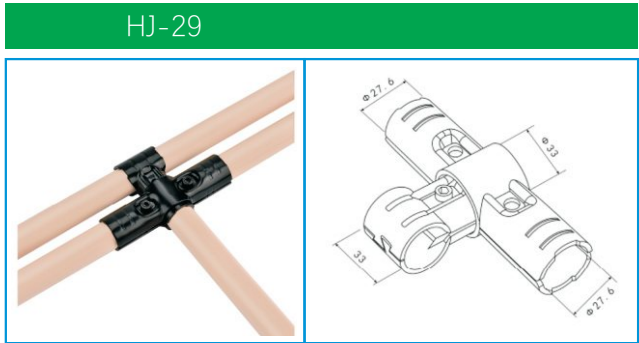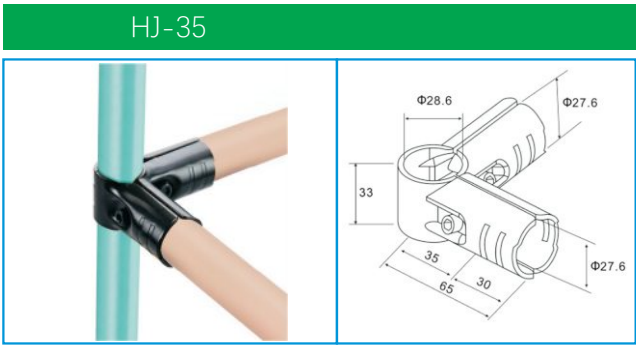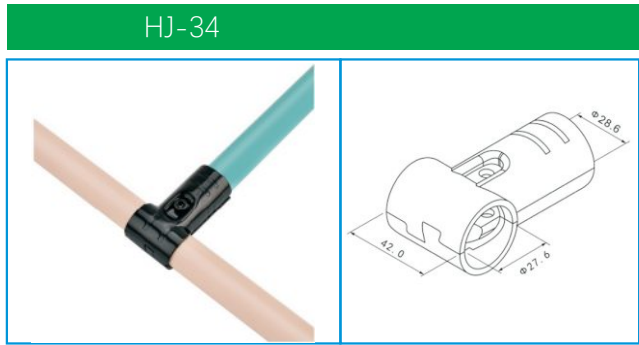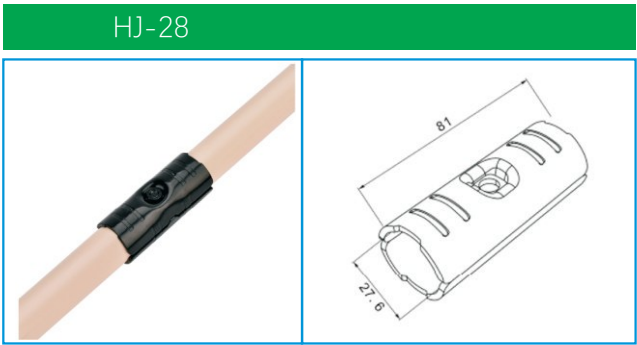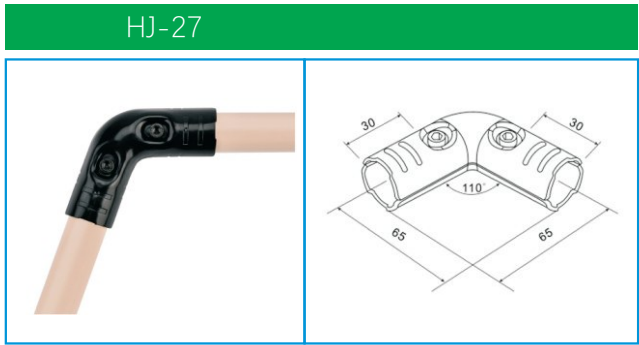


Aluminum Pipe Joint Series


SK-L1A Weight: 0.061kg 160sets/ctn

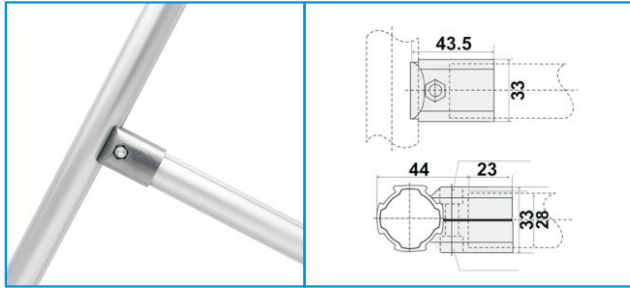


SK-L1B Weight: 0.049kg 270sets/ctn

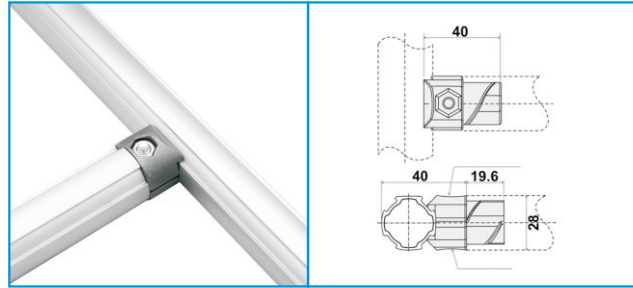


SK-L6 Weight: 0.119kg 80sets/ctn

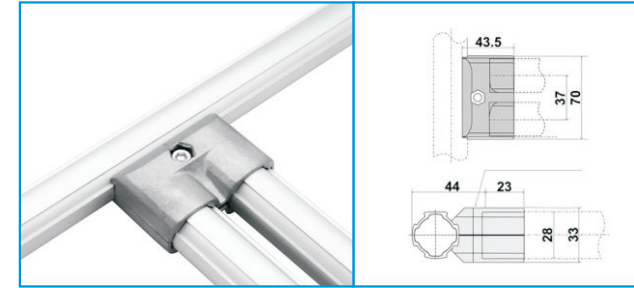


SK-L7 Weight: 0.080kg 120sets/ctn

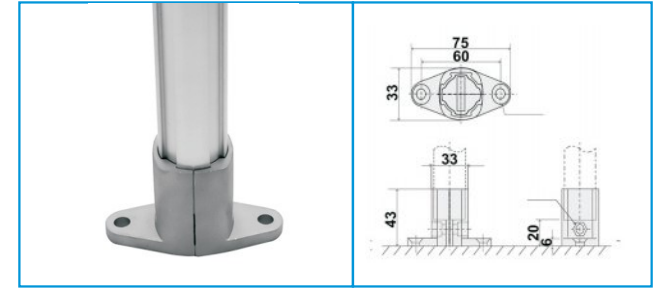


SK-L1C Weight: 0.048kg 270sets/ctn

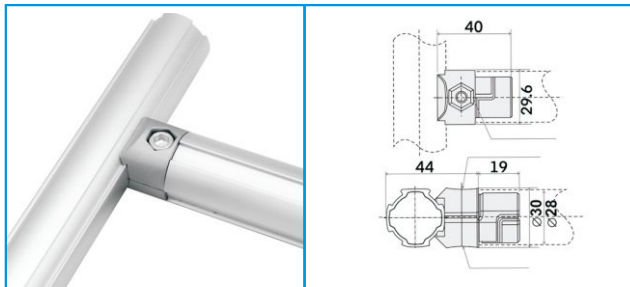


SK-L1D Weight: 0.049kg 270sets/ctn

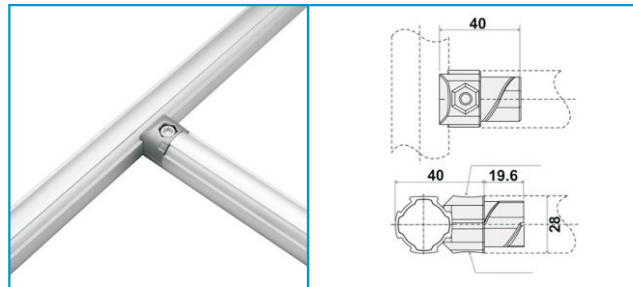


SK-L8 Weight: 0.095kg 130sets/ctn

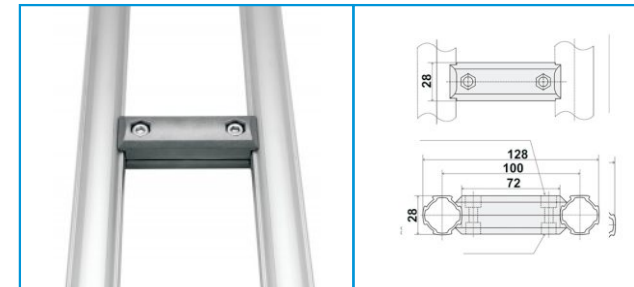


SK-L9 Weight: 0.027kg 630sets/ctn

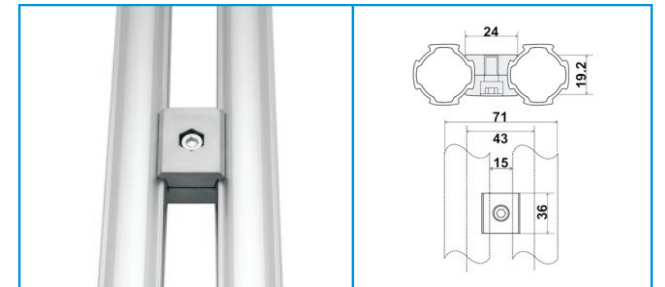

SK-L2 Weight: 0.059kg 336sets/ctn

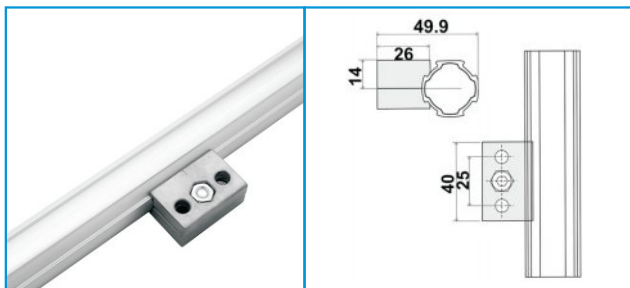


SK-L3 Weight: 0.052kg 300sets/ctn

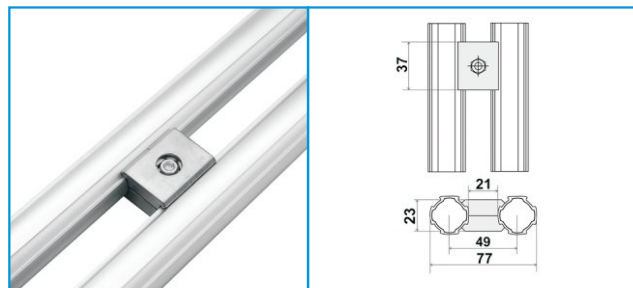


SK-L10 Weight: 0.024kg 500sets/ctn




SK-L11 Weight: 0.025kg 500sets/ctn

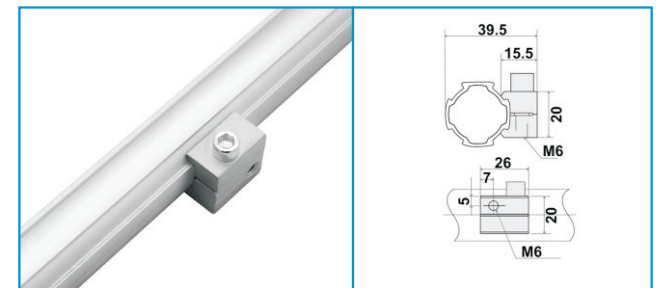


SK-L4 Weight: 0.035kg 480sets/ctn

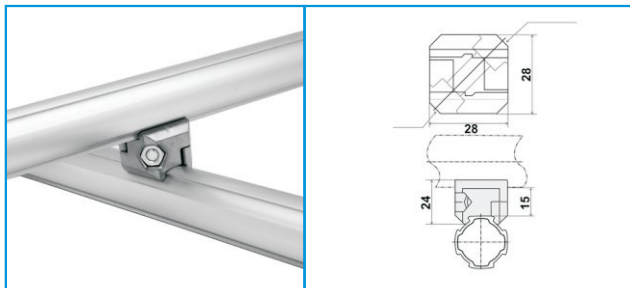


SK-L5 Weight: 0.075kg 128sets/ctn

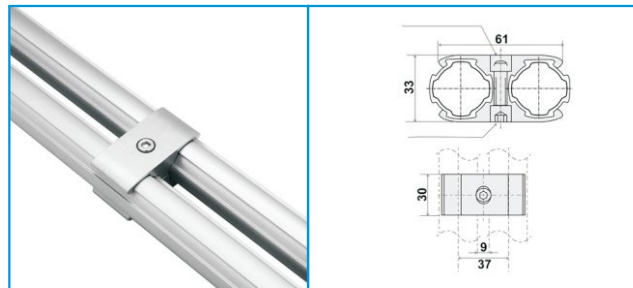

SK-L12 Weight: 0.043kg 250sets/ctn

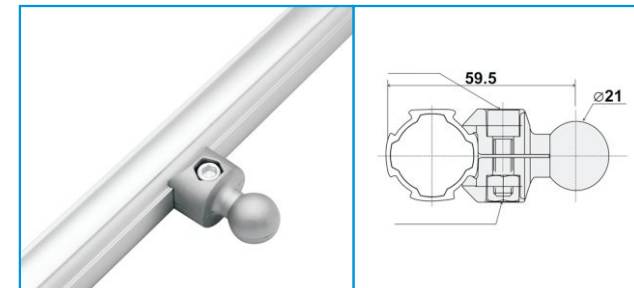


SK-L13 Weight: 0.031kg 490sets/ctn

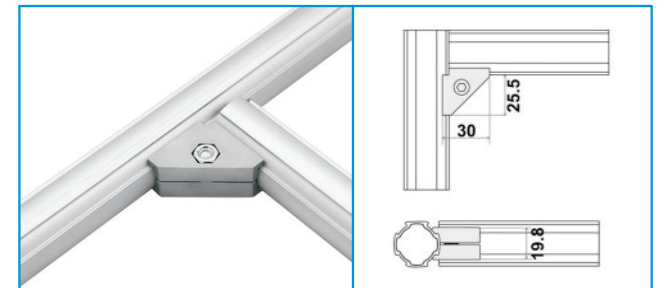


Aluminum Pipe Joint Series


SK-L16 Weight: 0.049kg 336sets/ctn

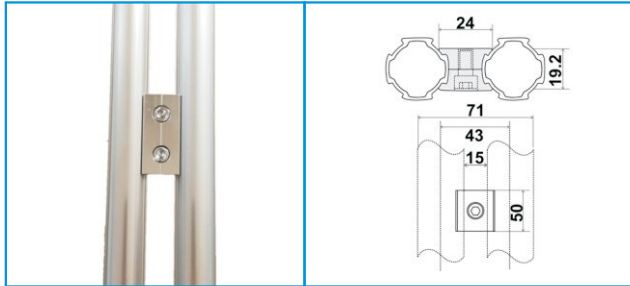


SK-L17 Weight: 0.051kg 150sets/ctn

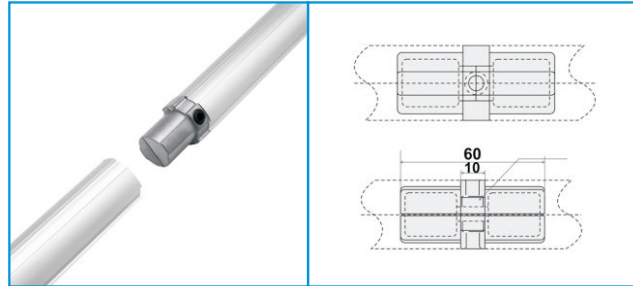


SK-L25 Weight: 0.383kg 30sets/ctn

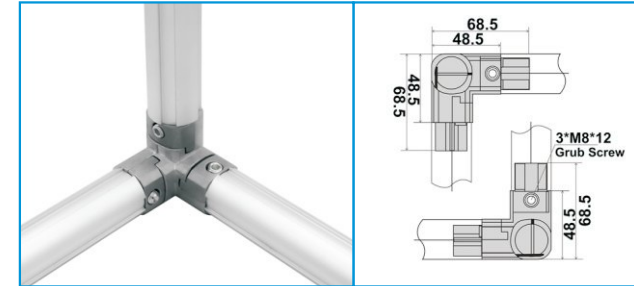


SK-L27 Weight: 0.011kg 500sets/ctn

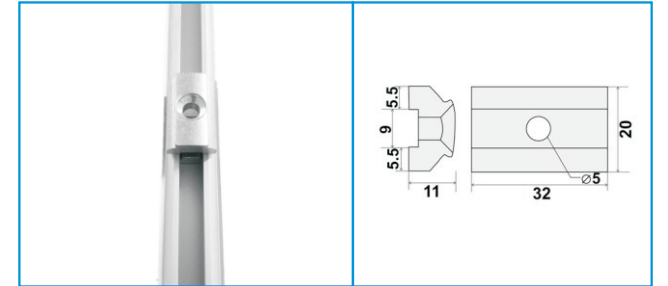


SK-L18 Weight: 0.037kg 432sets/ctn

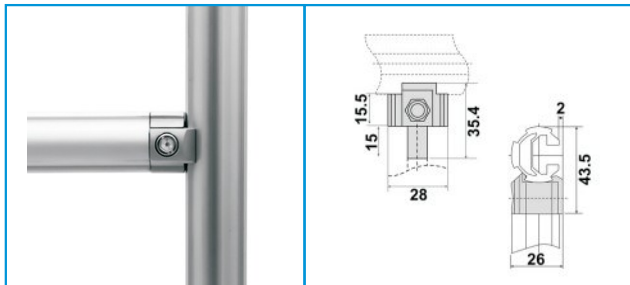


SK-L19 Weight: 0.078kg 180sets/ctn

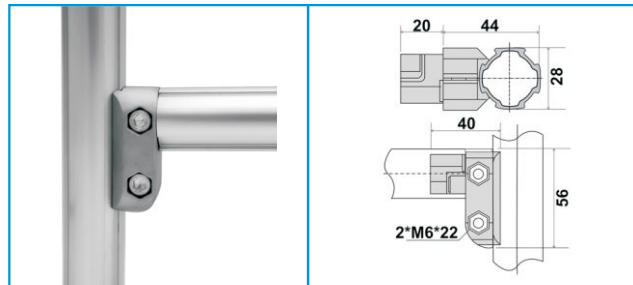


SK-L28 Weight: 0.010kg 500sets/ctn

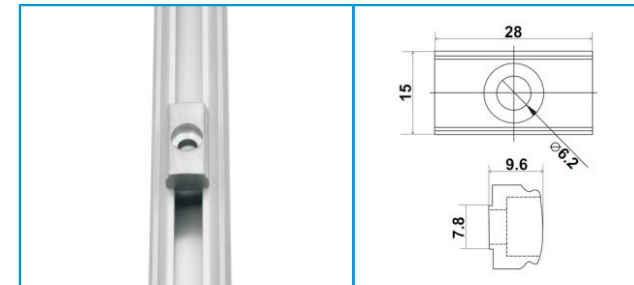


SK-L29 Weight: 0.017kg 500sets/ctn

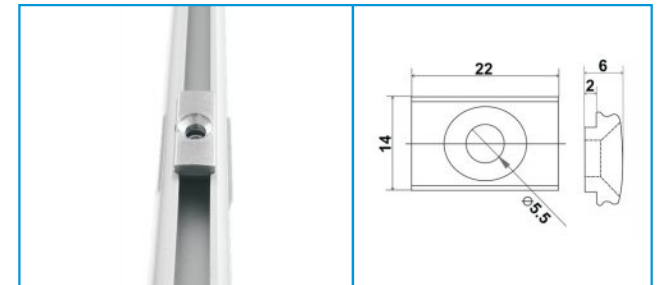


SK-L20

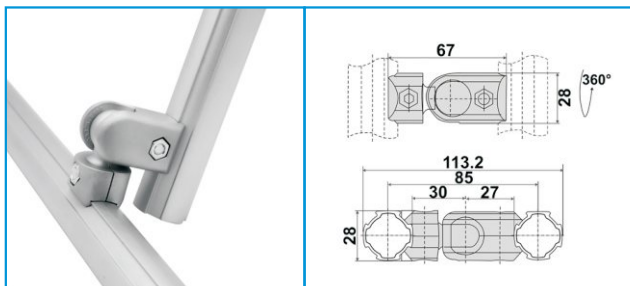


SK-L21 Weight: 0.086kg 96sets/ctn

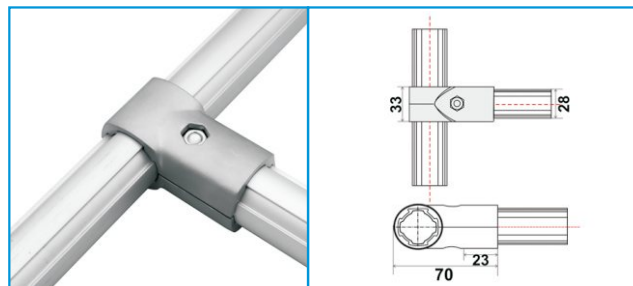


SK-L30 Weight: 0.051kg 150sets/ctn

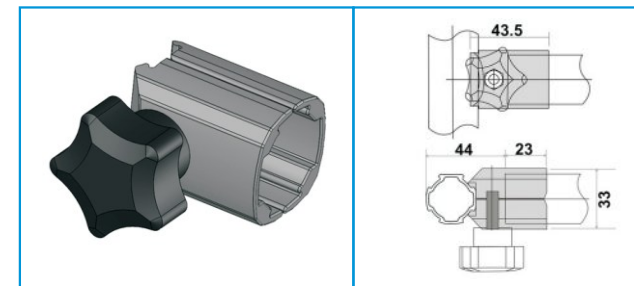


SK-L31 Weight: 0.048kg 150sets/ctn

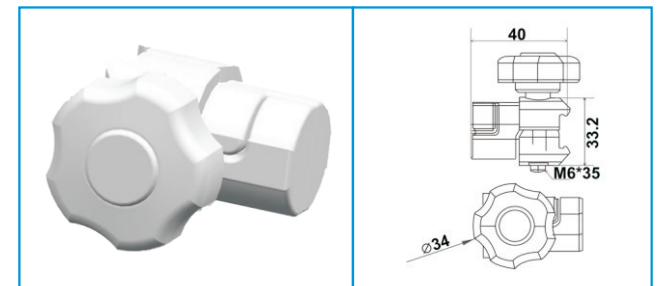


SK-L23 Weight: 0.145kg 64sets/ctn

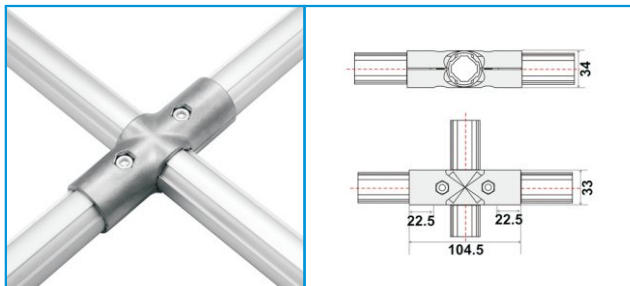


SK-L24 Weight: 0.023kg 400sets/ctn

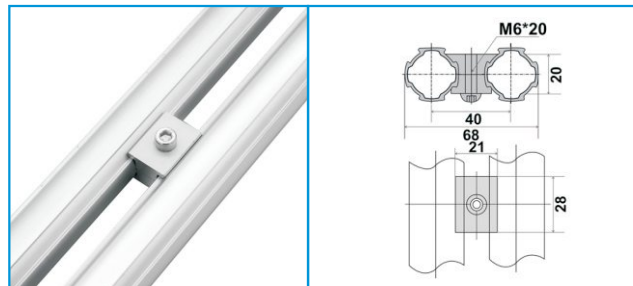

SK-L32 Weight: 0.048kg 150sets/ctn








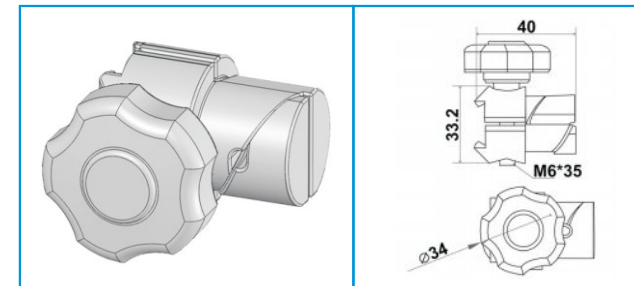


SK-L33 Weight: 0.070kg 100sets/ctn

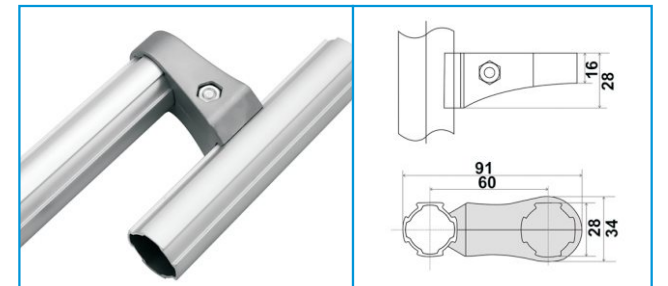











04

Aluminum Pipe Joint Series













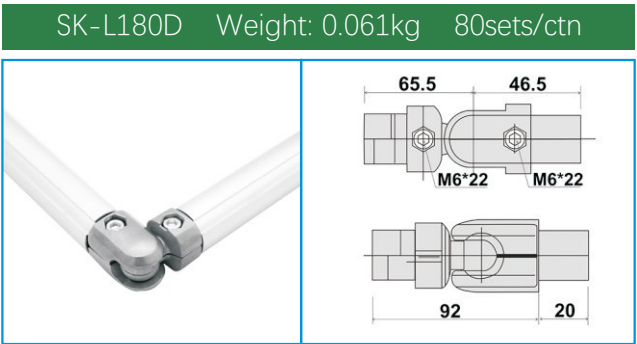
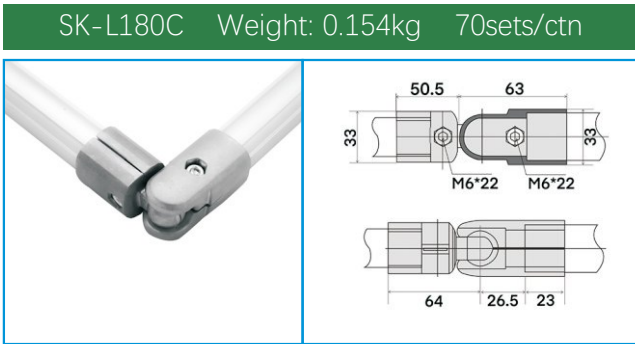
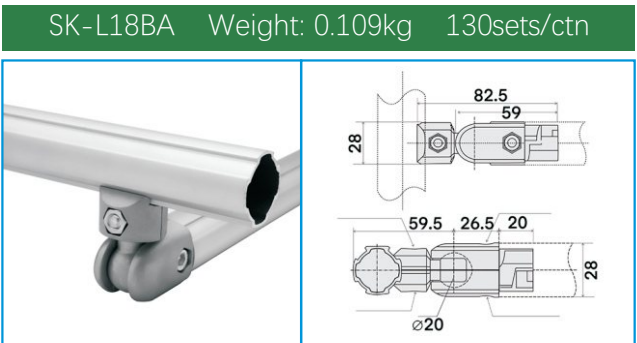
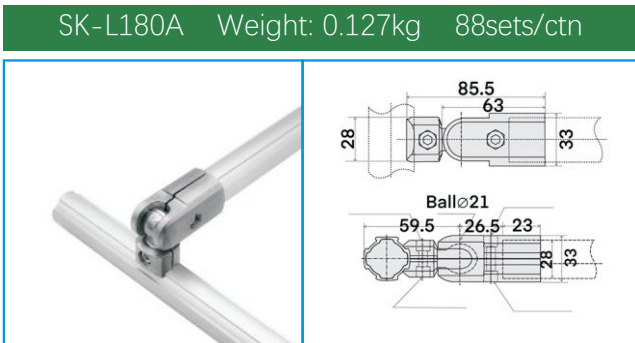
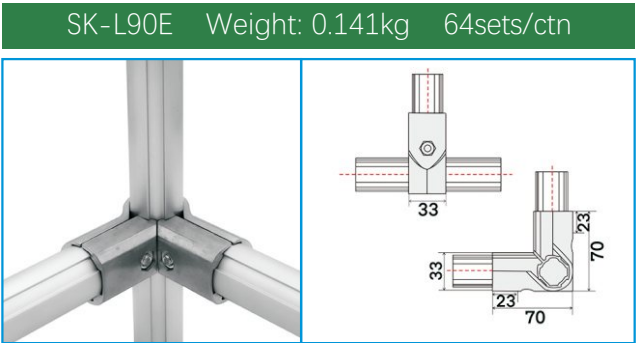
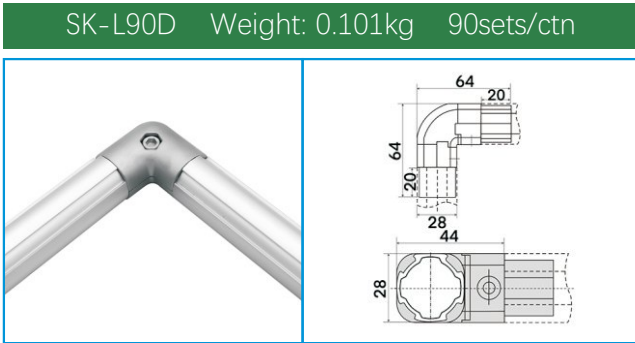
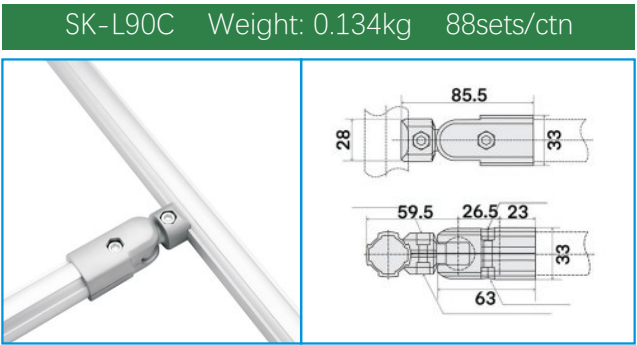
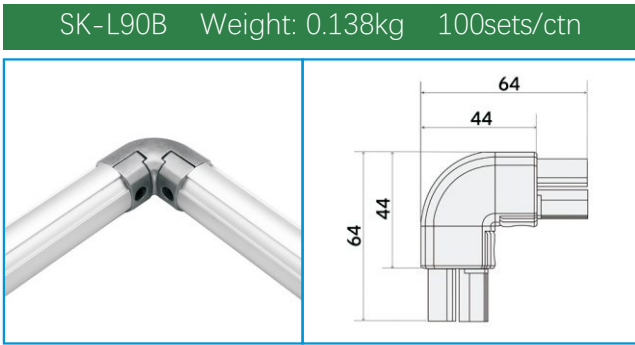


05





















Placon Mount Series

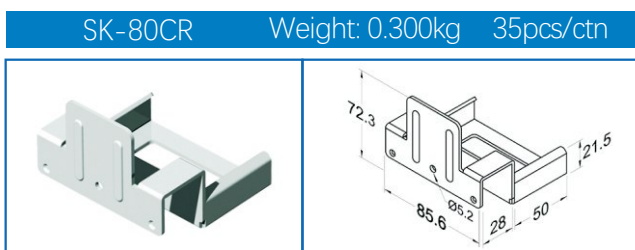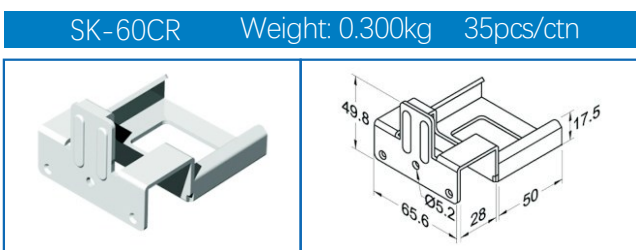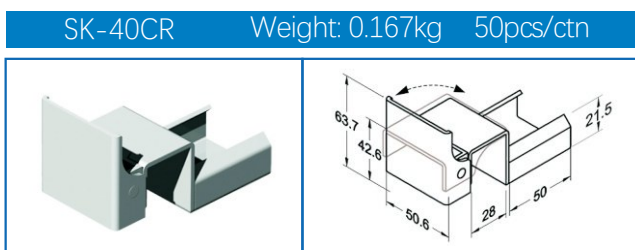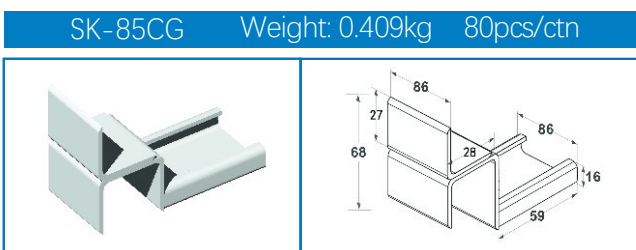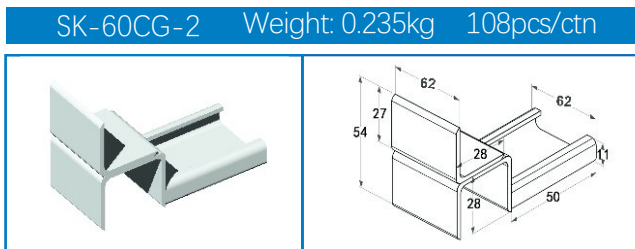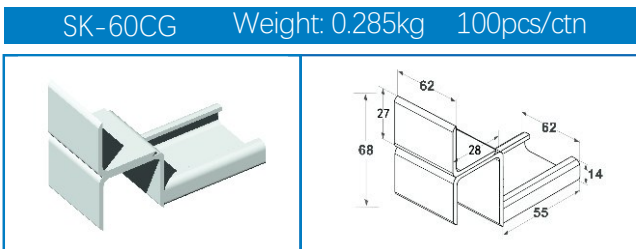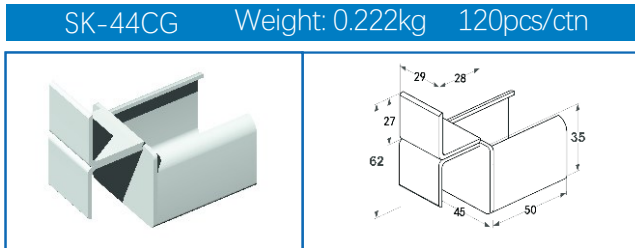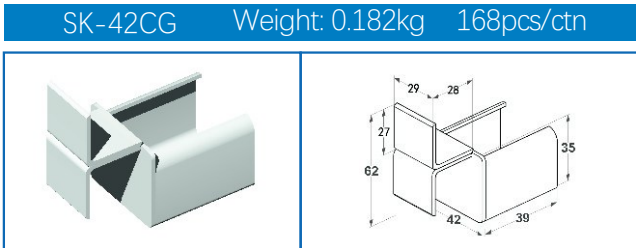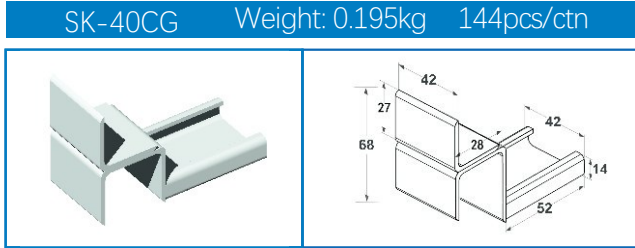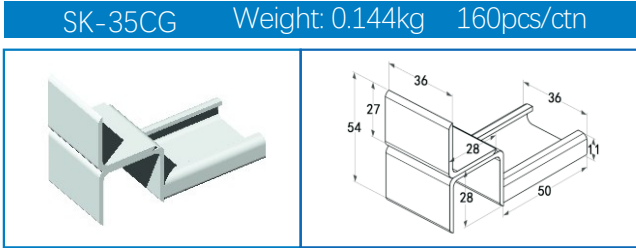





















Placon Mount Series

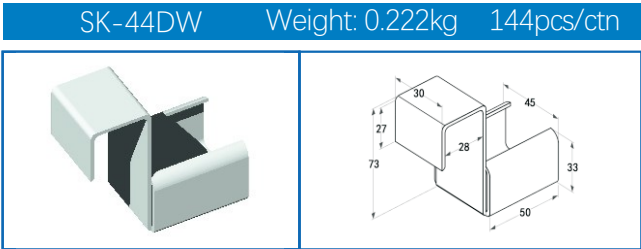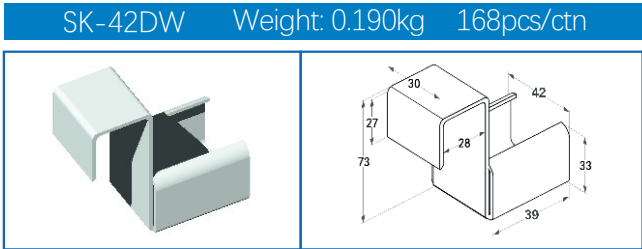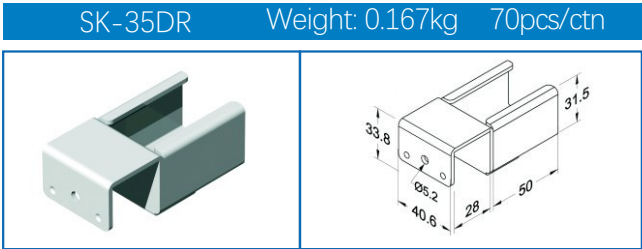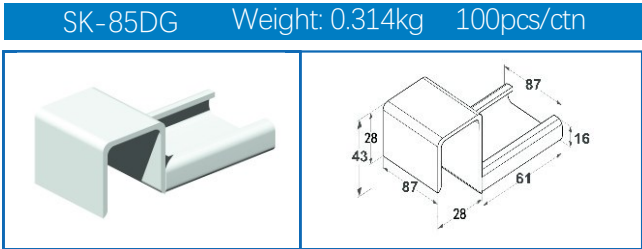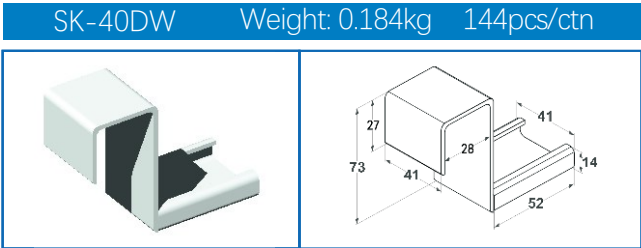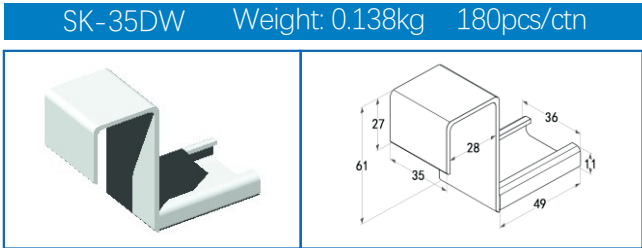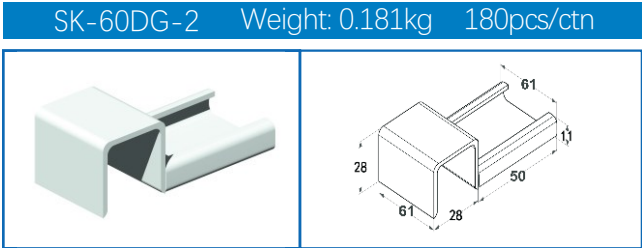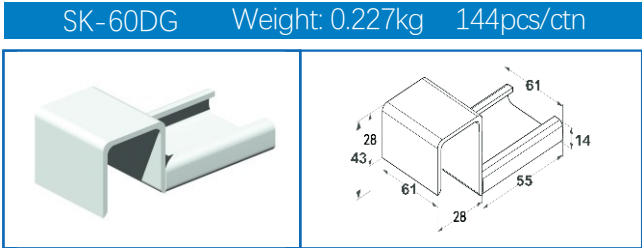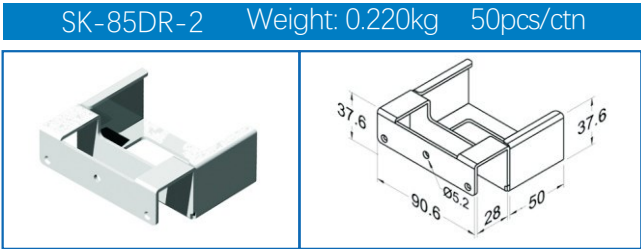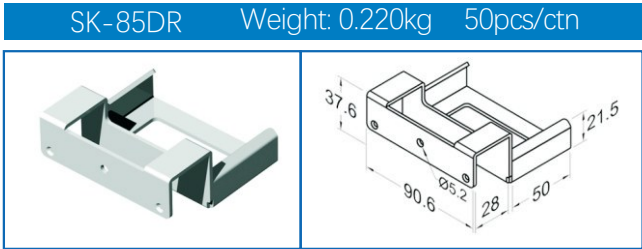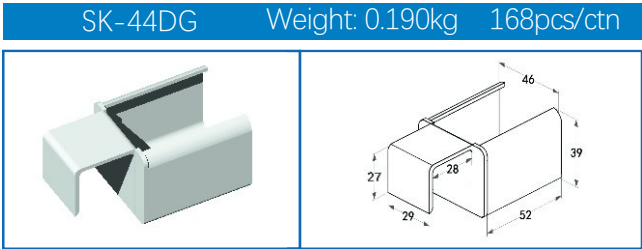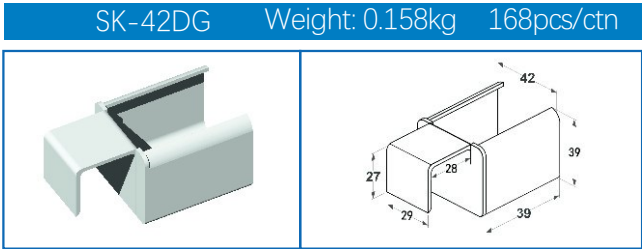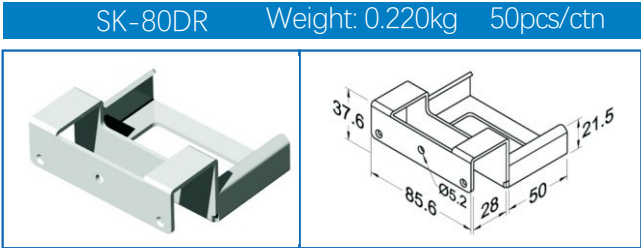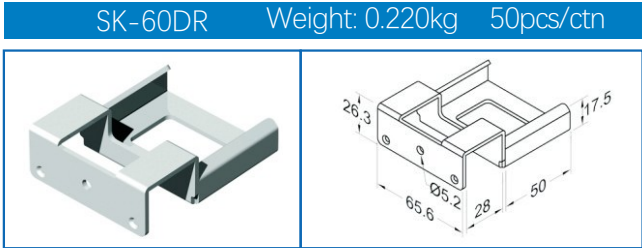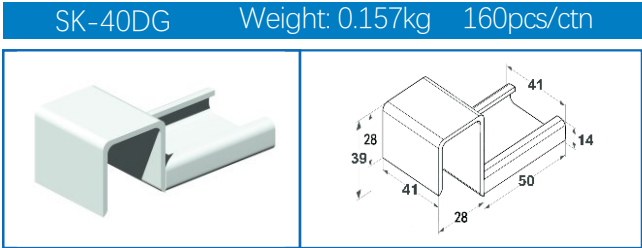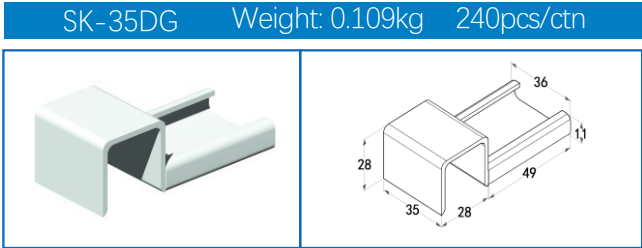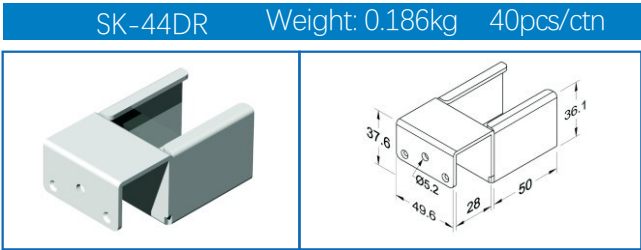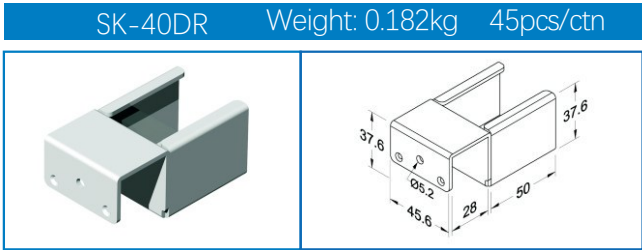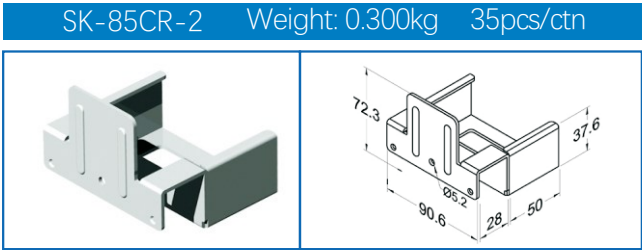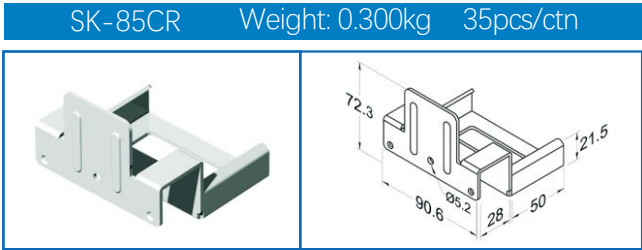





















Placon Mount Series

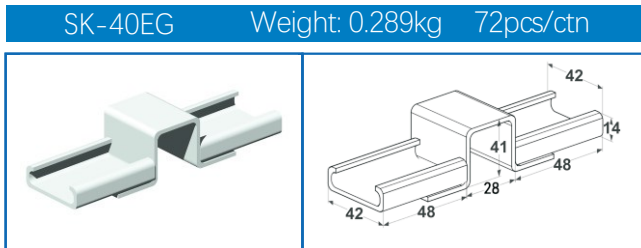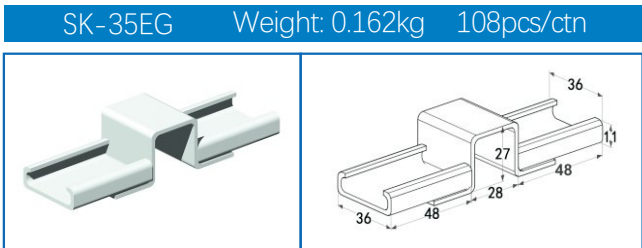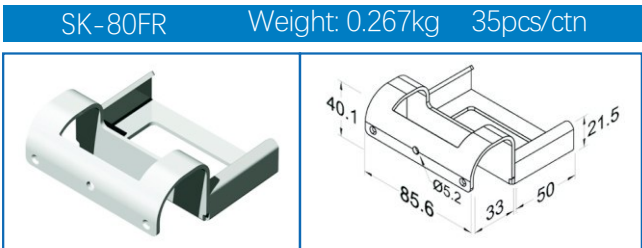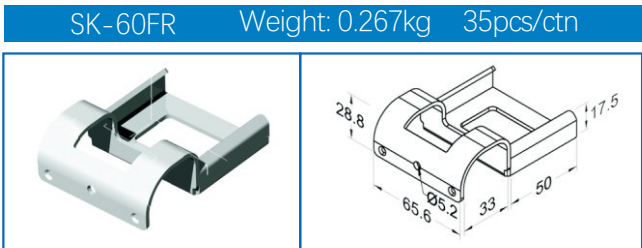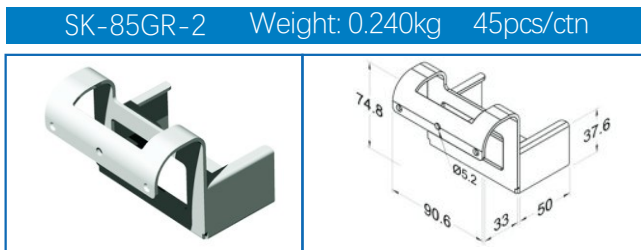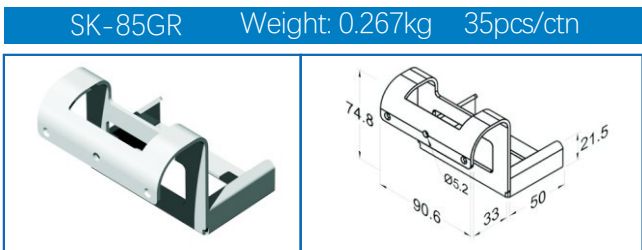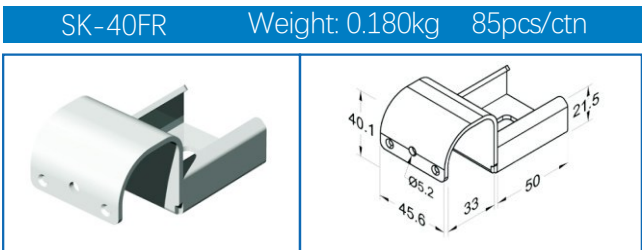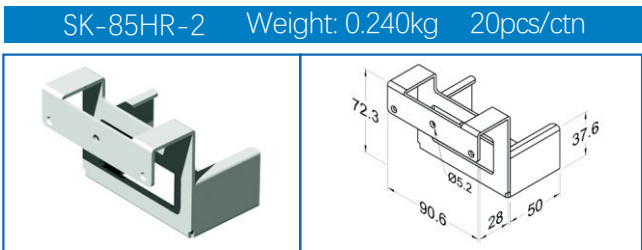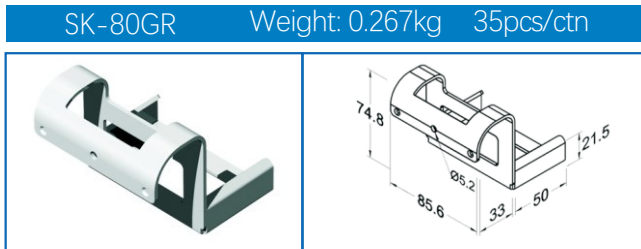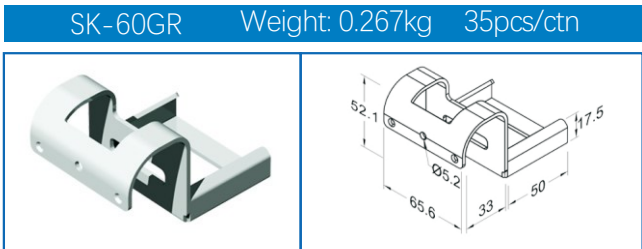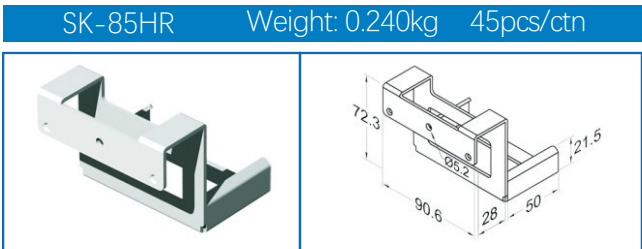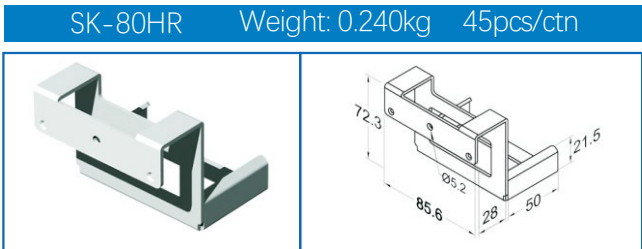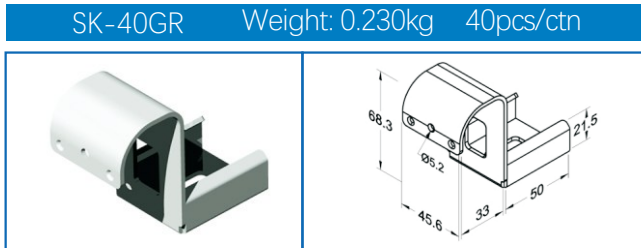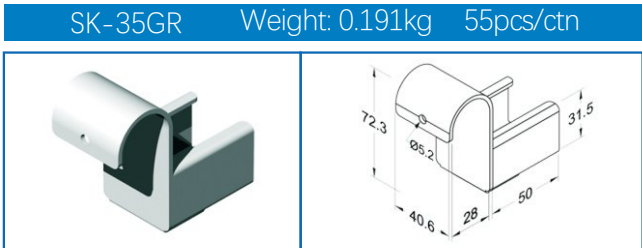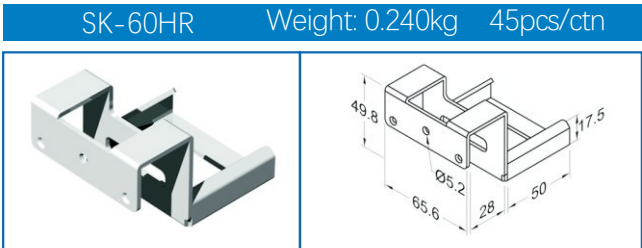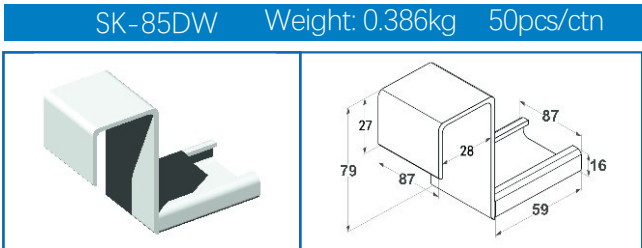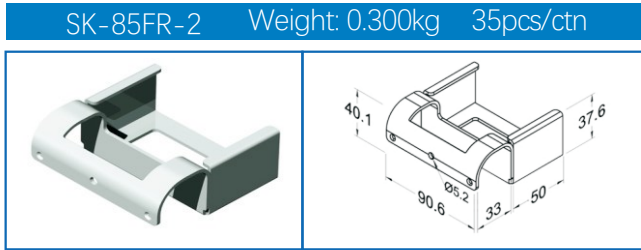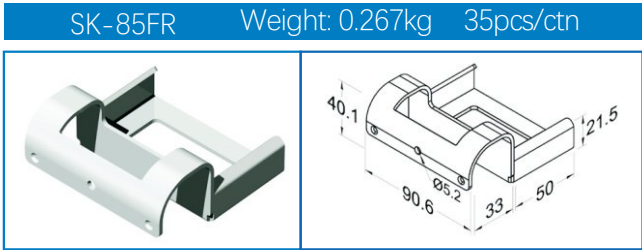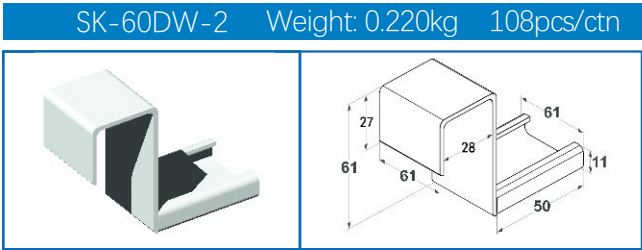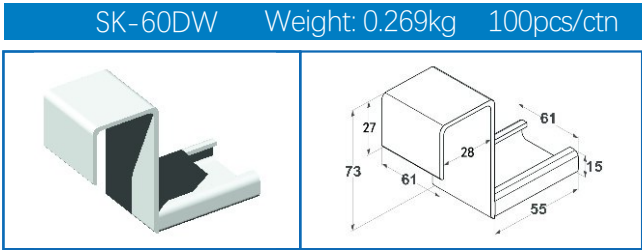

Placon Mount Series

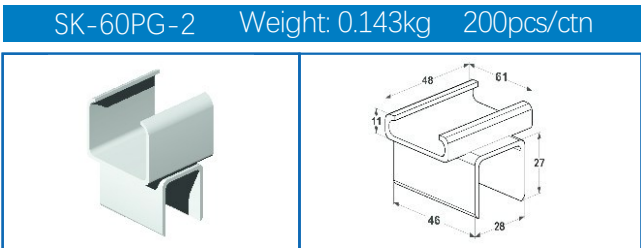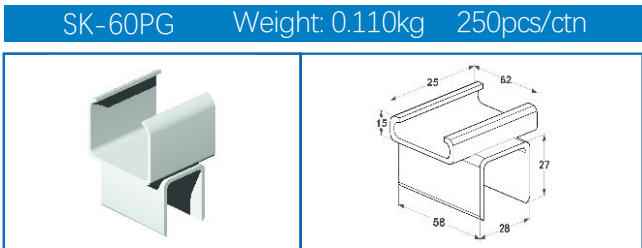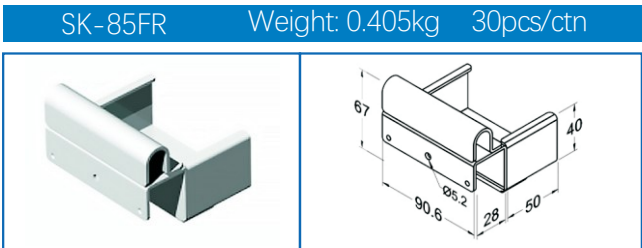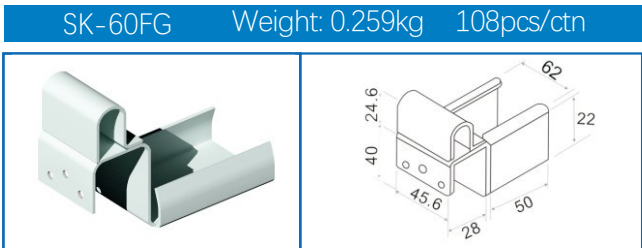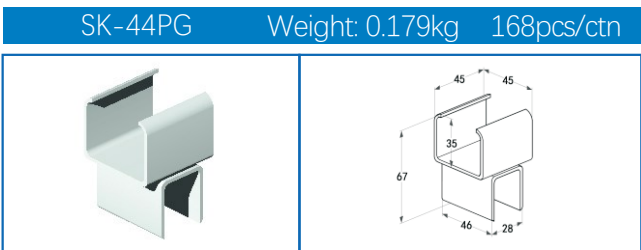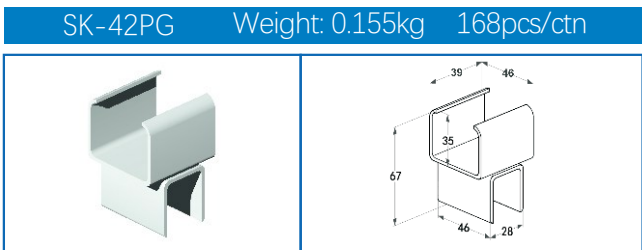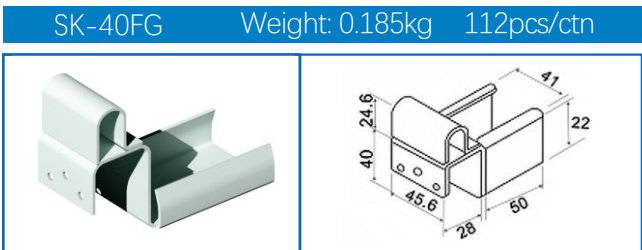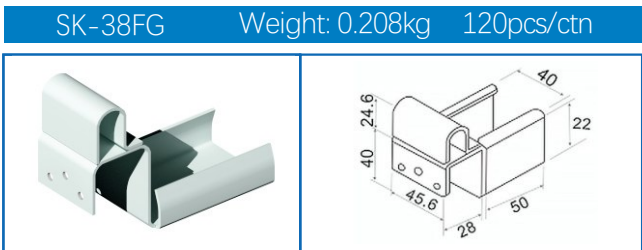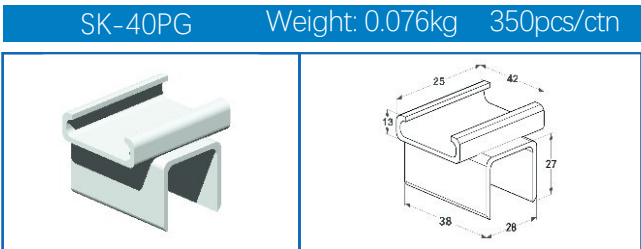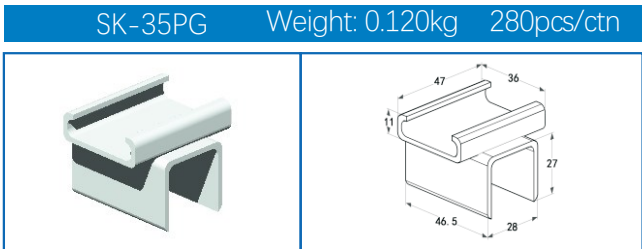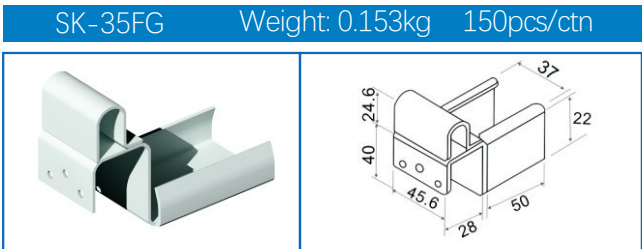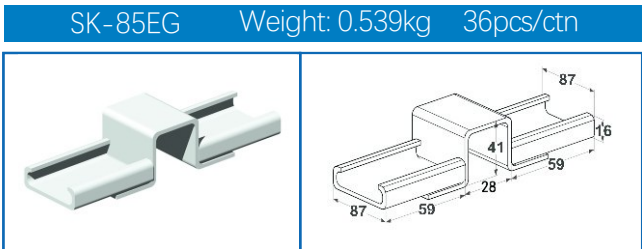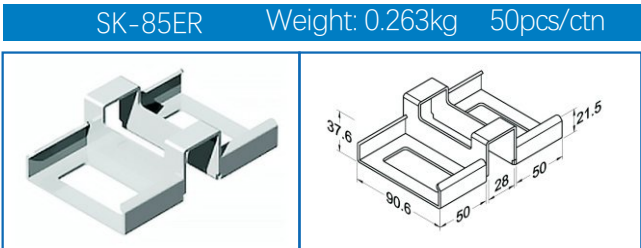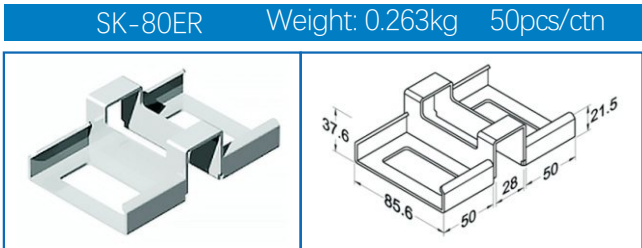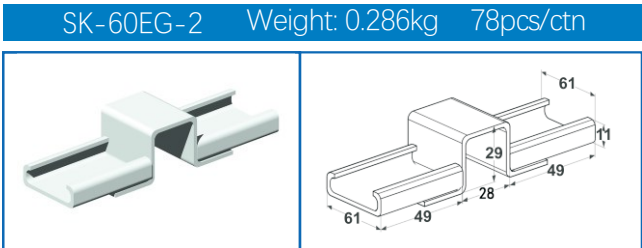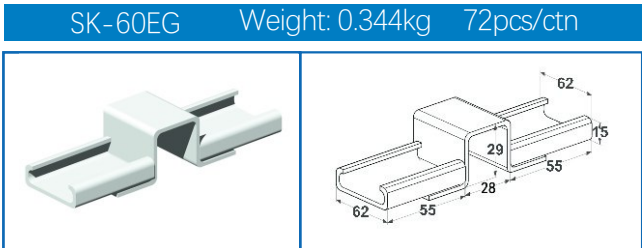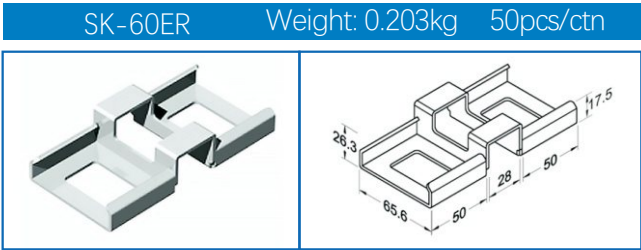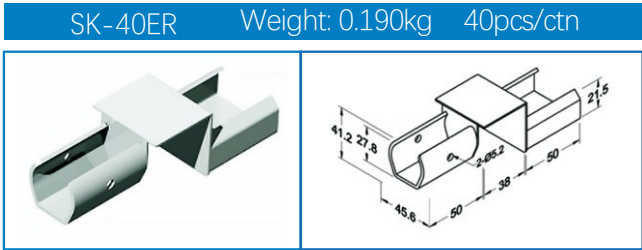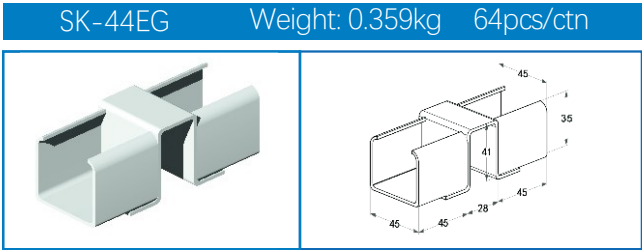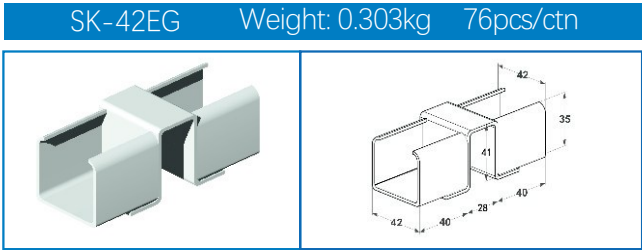


Placon Mount Series

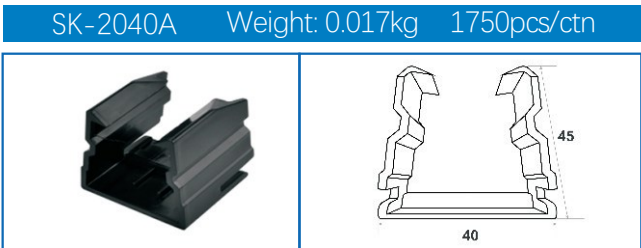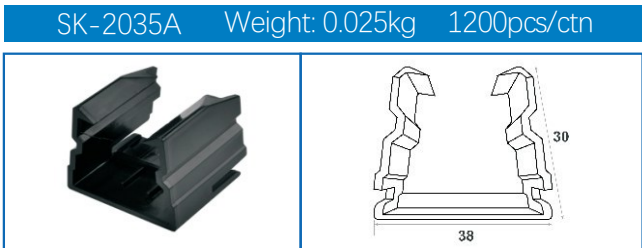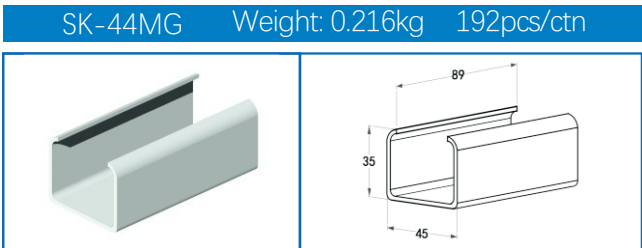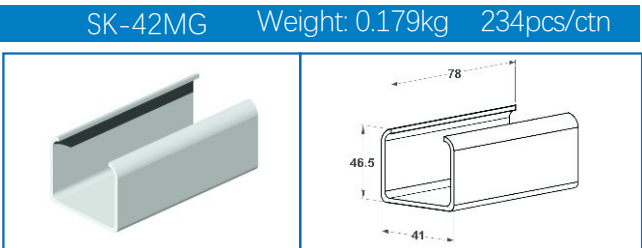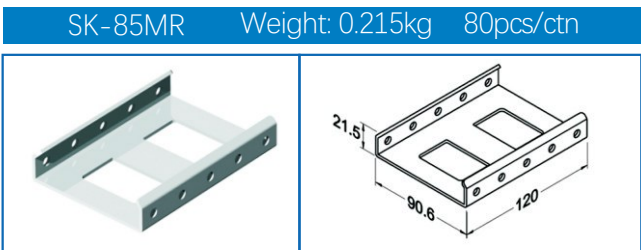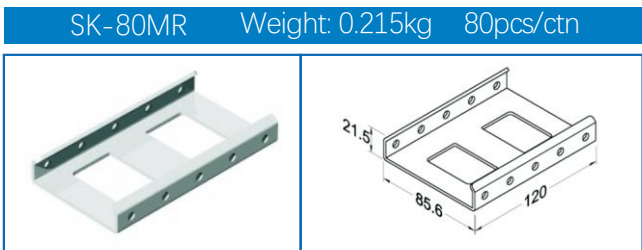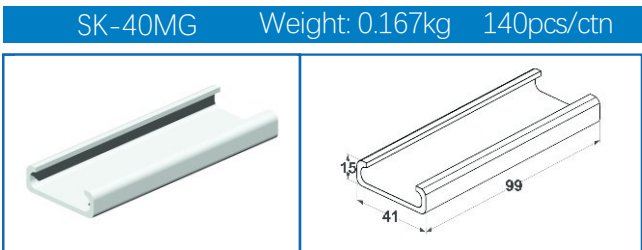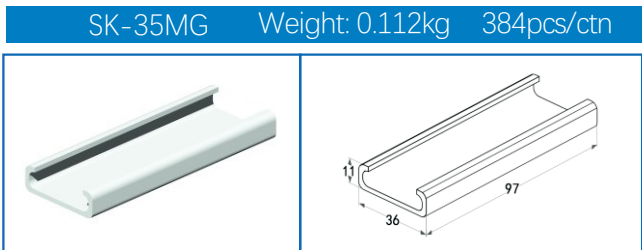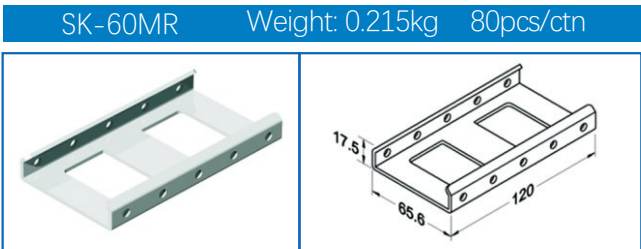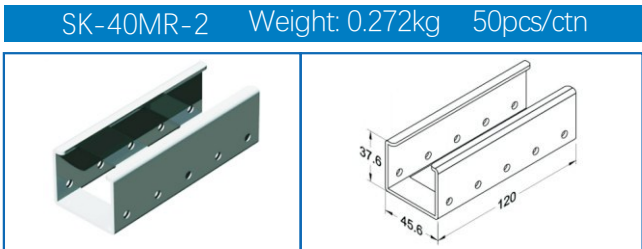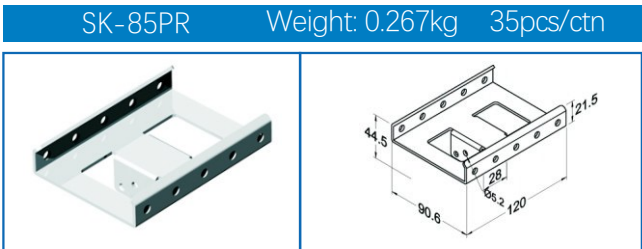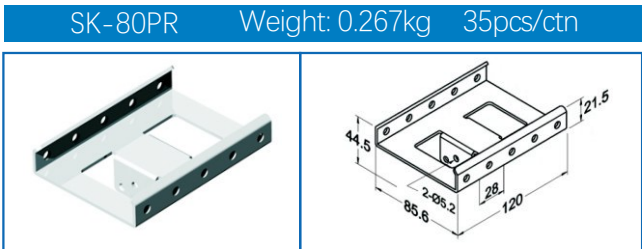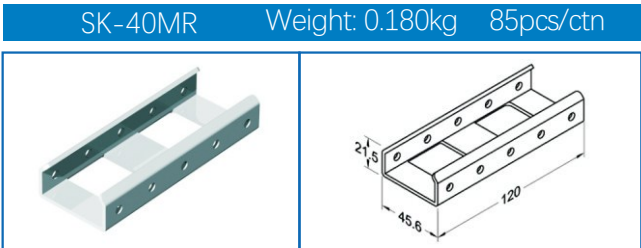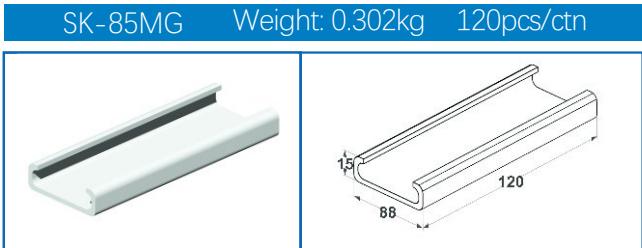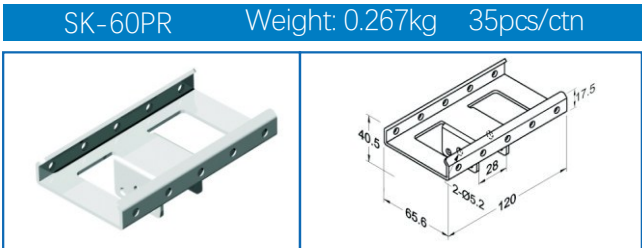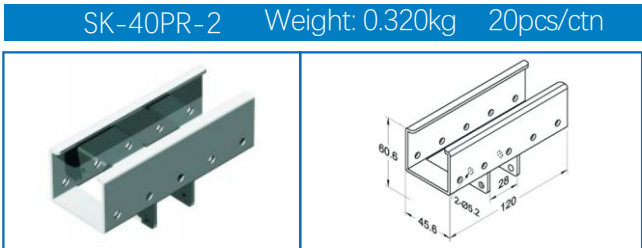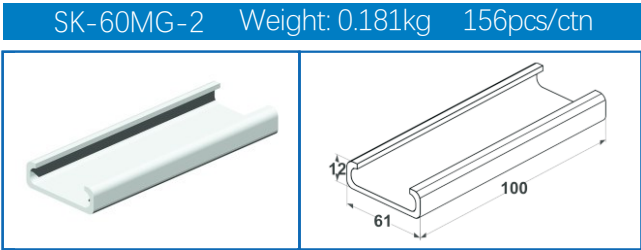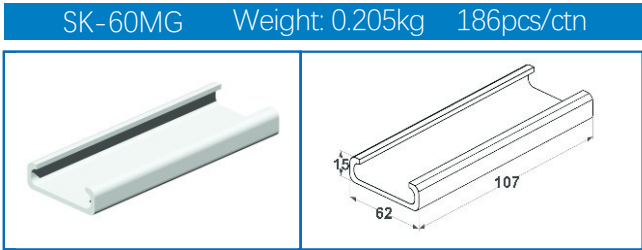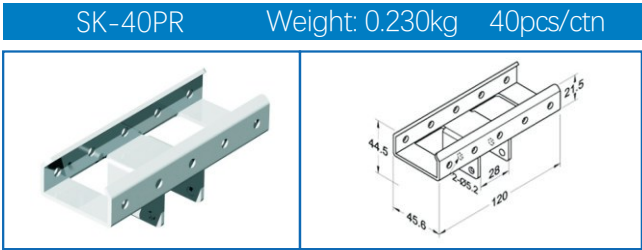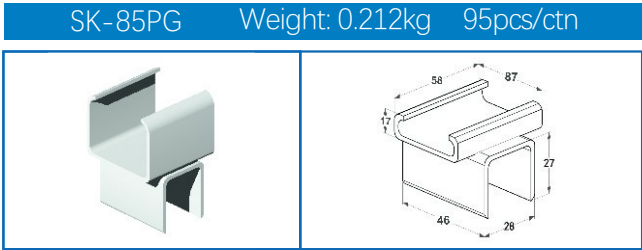


Placon Mount Series


SK-2040B Weight: 0.017kg 1750pcs/ctn

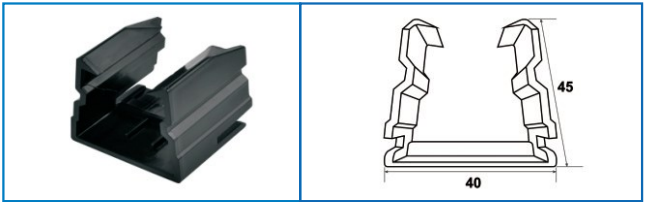


SK-2041A Weight: 0.018kg 1750pcs/ctn

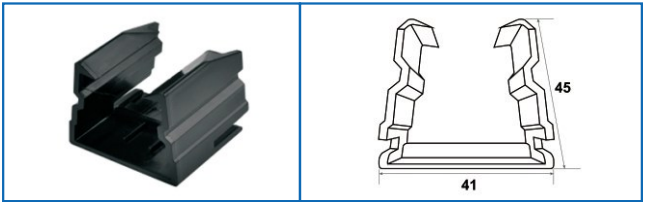


SK-2028P Weight: 0.141kg 330pcs/ctn

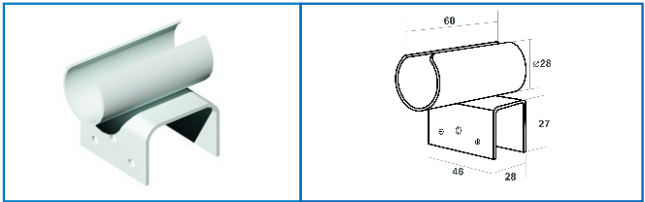


SK-2040C Weight: 0.185kg 136pcs/ctn

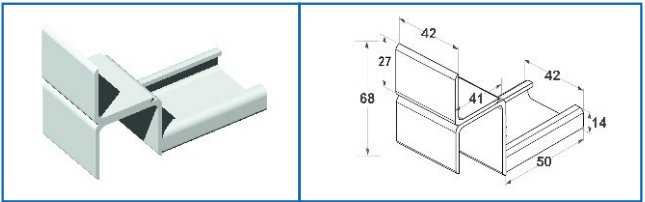


SK-2060A Weight: 0.025kg 1200pcs/ctn

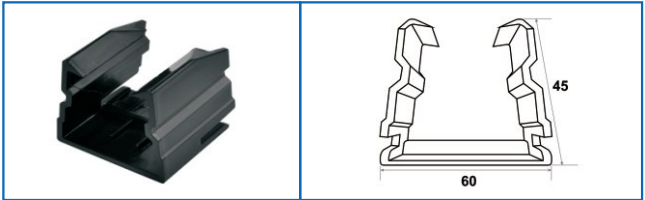


SK-2020

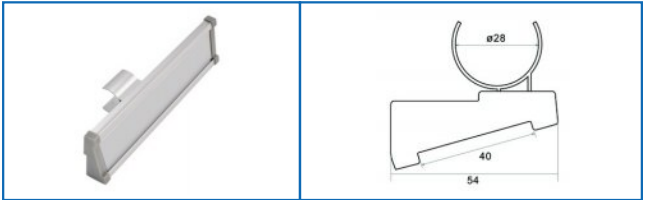

SK-2040D Weight: 0.151kg 136pcs/ctn

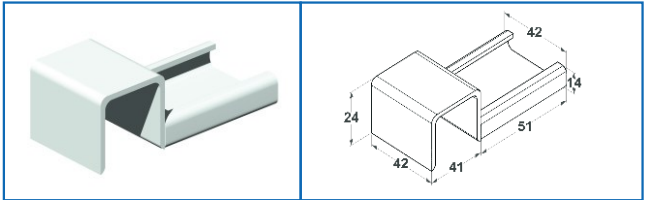


SK-2040DW Weight: 0.199kg 123pcs/ctn

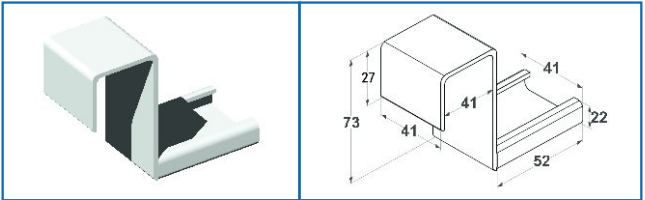


SK-2021 Weight: 0.05kg 400pcs/ctn




SK-2022

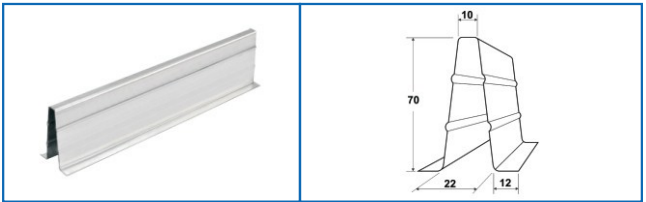


SK-2040E

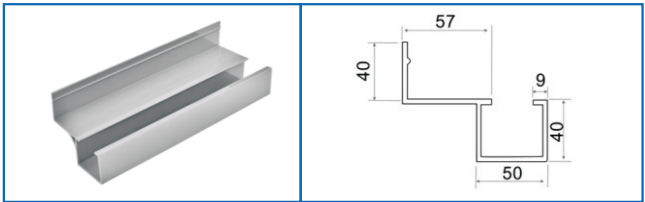


SK-2040F

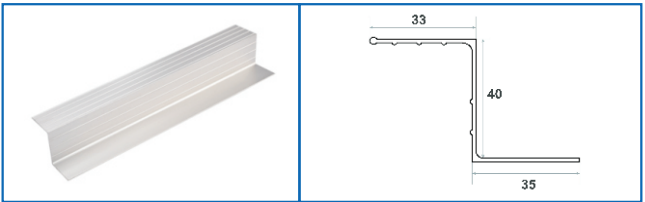


SK-2028A Weight: 0.171kg 50pcs/ctn

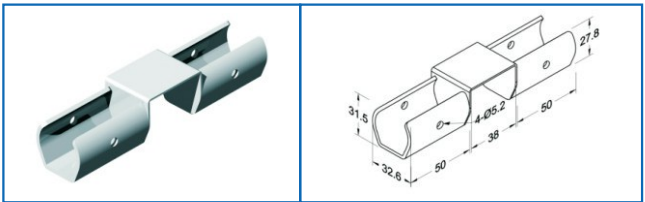


SK-2028C Weight: 0.173kg 136pcs/ctn

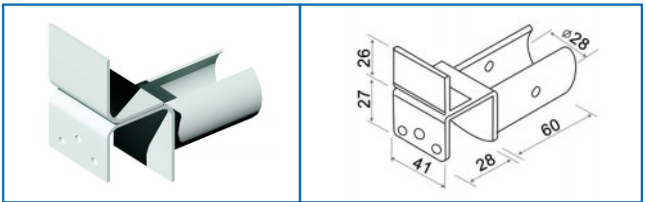


SK-2040G

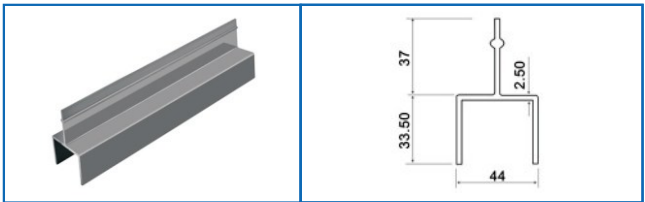


SK-2040H

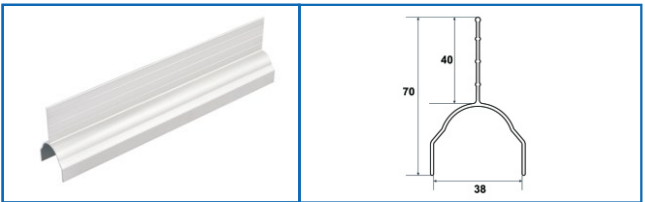


SK-2028D Weight: 0.14kg 300pcs/ctn

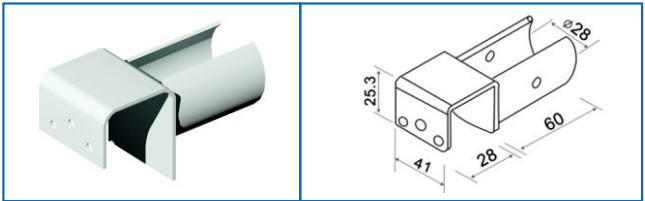


SK-2028DW Weight: 0.176kg 180pcs/ctn









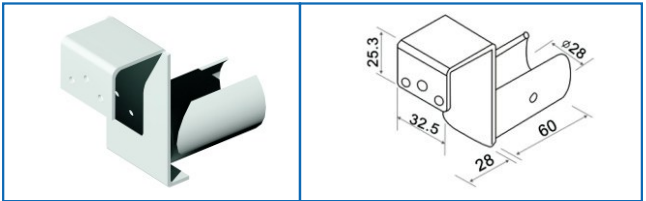


SK-2040I




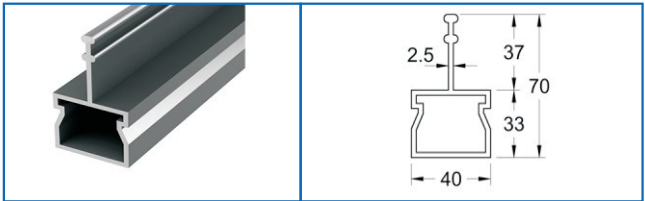









SK-2040J

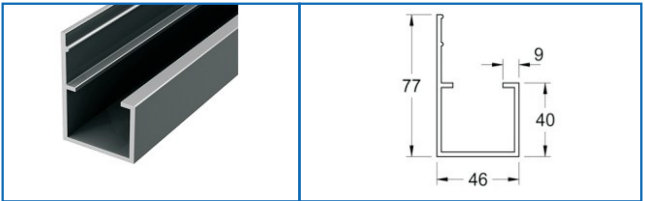

SK-1001	SK-1001A	SK-1001F	SK-1002	SK-1010A	SK-1010B	SK-1011	SK-1012
							
SK-1003	SK-1004	SK-1004A	SK-1004B	SK-1013A	SK-1013B	SK-1013C	SK-1013D
							
SK-1004C	SK-1005	SK-1006	SK-1007	SK-1014	SK-1014A	SK-1015	SK-1016A
							
SK-1008	SK-1008A	SK-1009	SK-1010	SK-1016B	SK-1016C	SK-1017A	SK-1017B
							

SK-1017C	SK-1018	SK-1019	SK-1020L	SK-1031	SK-1032	SK-1033	SK-1034
SK-1020R	SK-1021	SK-1020A	SK-1022	SK-1035	SK-1036	SK-1037	SK-1038
SK-1022A	SK-1023	SK-1024	SK-1025	SK-1039	SK-1040	SK-1041	SK-1042
SK-1026	SK-1027	SK-1030	SK-1030A	SK-1043	SK-1043A	SK-1044	SK-1044A

SK-1045 	SK-1046 	SK-1047 	SK-1048 				
SK-1105 	SK-1106 	SK-1107 	SK-1108 				
SK-1049 	SK-1050 	SK-1051 	SK-1052 	SK-1109 	SK-1110 	SK-1111 	SK-1112 
SK-1100 	SK-1101 	SK-1101-B 	SK-1102 	SK-1113 	SK-1114 	SK-1115 	SK-1116 
SK-1102-B 	SK-1103 	SK-1103-B 	SK-1104 	SK-1117 	SK-1118 	SK-1119 	SK-1120 

SK-1121 	SK-1121 	SK-1122 	SK-1123 	SK-3009 	SK-3010 	SK-3011 	SK-3016 
SK-M6*12 	SK-M6*25 	SK-N1 	SK-N3 	SK-3017 	SK-3018 	SK-3019 	SK-3020 
SK-N6 	SK-3001 	SK-3003 	SK-3004 	SK-3022 	SK-3023 	SK-3024 	SK-3025 
SK-3005 	SK-3006 	SK-3007 	SK-3008 	SK-3026 	SK-3027 	SK-3028 	SK-3029 

06

Auxiliary Components Series


SK-3030-37/55/100/150



SK-3031-37/55/100/150



SK-3032



SK-3034



SK-3034



SK-3050



SK-3051



SK-3052



SK-3035-0.2/0.5/1.0/2.0



SK-3036



SK-3037



SK-3038



SK-3053



SK-3054



SK-3056



SK-3057



SK-30040



SK-3041



SK-3042



SK-3043




SK-3058



SK-3059



SK-3060



SK-3061



SK-3044



SK-3045



SK-3046LR



SK-3048



SK-3062



SK-3063



SK-3064



SK-3065



Caster Series

 SK-P-PU-D	轮径(mm) Wheel Dia	轮宽(mm) Wheel Width	底板尺寸(mm) Base Plate Size	孔距(mm) Pitch	安装高度(mm) Mounting Height	厚度(mm) Mounting Thickness	承重(kg) Load bearing
							
	75	32	92*63	75*45	105	2.3	80
	100	32	92*63	75*45	128	2.3	100
	125	32	92*63	75*45	150	2.3	120

 SK-P-PU-WBS	轮径(mm) Wheel Dia	轮宽(mm) Wheel Width	底板尺寸(mm) Base Plate Size	孔距(mm) Pitch	安装高度(mm) Mounting Height	厚度(mm) Mounting Thickness	承重(kg) Load bearing
							
	75	32	92*63	75*45	105	2.3	80
	100	32	92*63	75*45	128	2.3	100
	125	32	92*63	75*45	150	2.3	120

 SK-P-PU-W	轮径(mm) Wheel Dia	轮宽(mm) Wheel Width	底板尺寸(mm) Base Plate Size	孔距(mm) Pitch	安装高度(mm) Mounting Height	厚度(mm) Mounting Thickness	承重(kg) Load bearing
							
	75	32	92*63	75*45	105	2.3	80
	100	32	92*63	75*45	128	2.3	100
	125	32	92*63	75*45	150	2.3	120

 SK-LC-PU	轮径(mm) Wheel Dia	轮宽(mm) Wheel Width	丝杆规格(mm) Thread Stem	丝杆规格(mm) Thread Stem	安装高度(mm) Mounting Height	厚度(mm) Mounting Thickness	承重(kg) Load bearing
							
	75	32	30	M12	105	2.3	80
	100	32	30	M12	128	2.3	100
	125	32	30	M12	150	2.3	120

 SK-P-PU-WS	轮径(mm) Wheel Dia	轮宽(mm) Wheel Width	底板尺寸(mm) Base Plate Size	孔距(mm) Pitch	安装高度(mm) Mounting Height	厚度(mm) Mounting Thickness	承重(kg) Load bearing
							
	75	32	92*63	75*45	105	2.3	80
	100	32	92*63	75*45	128	2.3	100
	125	32	92*63	75*45	150	2.3	120

 SK-LC-PU-S	轮径(mm) Wheel Dia	轮宽(mm) Wheel Width	丝杆规格(mm) Thread Stem	丝杆规格(mm) Thread Stem	安装高度(mm) Mounting Height	厚度(mm) Mounting Thickness	承重(kg) Load bearing
							
	75	32	30	M12	105	2.3	80
	100	32	30	M12	128	2.3	100
	125	32	30	M12	150	2.3	120

Caster Series

 SK-C-PU	轮径(mm) Wheel Dia	轮宽(mm) Wheel Width	丝杆规格(mm) Thread Stem	丝杆规格(mm) Thread Stem	安装高度(mm) Mounting Height	厚度(mm) Mounting Thickness	承重(kg) Load bearing
							
	75	32	30	M12	105	2.3	80
	100	32	30	M12	128	2.3	100
	125	32	30	M12	150	2.3	120

 SK-P-PVC-W	轮径(mm) Wheel Dia	轮宽(mm) Wheel Width	丝杆规格(mm) Thread Stem	丝杆规格(mm) Thread Stem	安装高度(mm) Mounting Height	厚度(mm) Mounting Thickness	承重(kg) Load bearing
							
	40	20	60*43	44*30	60	1.8	30
	50	23	71*52	52*35	75	1.8	40


 SK-C-PU-S	轮径(mm) Wheel Dia	轮宽(mm) Wheel Width	丝杆规格(mm) Thread Stem	丝杆规格(mm) Thread Stem	安装高度(mm) Mounting Height	厚度(mm) Mounting Thickness	承重(kg) Load bearing
							
	75	32	30	M12	105	2.3	80
	100	32	30	M12	128	2.3	100
	125	32	30	M12	150	2.3	120

 SK-P-PVC-WS	轮径(mm) Wheel Dia	轮宽(mm) Wheel Width	丝杆规格(mm) Thread Stem	丝杆规格(mm) Thread Stem	安装高度(mm) Mounting Height	厚度(mm) Mounting Thickness	承重(kg) Load bearing
							
	40	20	60*43	44*30	60	1.8	30
	50	23	71*52	52*35	75	1.8	40

 SK-P-PVC-D	轮径(mm) Wheel Dia	轮宽(mm) Wheel Width	丝杆规格(mm) Thread Stem	丝杆规格(mm) Thread Stem	安装高度(mm) Mounting Height	厚度(mm) Mounting Thickness	承重(kg) Load bearing
							
	40	20	60*43	44*30	60	1.8	30
	50	23	71*52	52*35	75	1.8	40

 SK-LC-PVC	轮径(mm) Wheel Dia	轮宽(mm) Wheel Width	丝杆规格(mm) Thread Stem	丝杆规格(mm) Thread Stem	安装高度(mm) Mounting Height	厚度(mm) Mounting Thickness	承重(kg) Load bearing
							
	40	20	20	M8	60	1.8	30
	50	23	25	M10	75	1.8	40

ESD PVC Black Grid Curtain




- Item no.: SK-8C-BKG
- Material: PVC
- Size: 1.37*30 M
- Thickness: 0.25-2.0 mm
- Color: Black Grid
- Surface resistance: 10e6-10e9
- Customization: ROHS 2.0
- Application: barrier wall, curtain or cover for ESD sensitive environment

ESD Anti-fatigue Mat




- Item no.: SK-8A
- Material: PVC + EPDM Foam + Conductive Rubber
- Size: 600*450mm; 600*900mm
customize size max width 2m
- Thickness: 17; 20mm
- Color: Black-yellow; Black
- Surface Resistance: 1 0e6-1 0e9
- Heat Resistance: <120 °C
- Application: Sensitive electronic equipments, Integrated circuits, quality control labs

High-elastic Eva laminated sheet

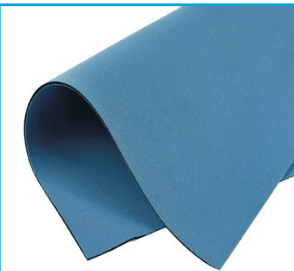


- Item number: SK-851
- Material: high elastic EVA+nylon
- Color: black, yellow and red
- EVA thickness: 3mm
- Hardness: 35degrees
- Size: W1.4m*L1m/2m/3m(Support custom size)
- Application: widely used in electrical appliances precision instruments instruments, office equipment sporting sporting goods, hardware and machinery automotive electronic accessories

PVC waterproof tarpaulin mesh

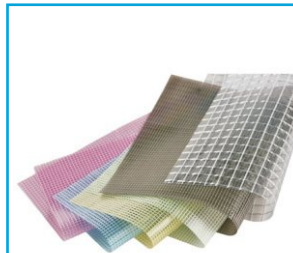

- Item number: SK-8G
- Material: PVC+nylon
- Size: W1.52m*L91m
- Thickness: 0.5mm, 0.8mm, 1mm
- Grid size: 3*3mm, 5*5mm, 10*10mm,
- Square weight: 280d, 360d
- Application:uggage, handbags, outdoor products, document bags, dust-proof car partition curtains, industrial supplies, etc.

ESD PVC Clean Curtain

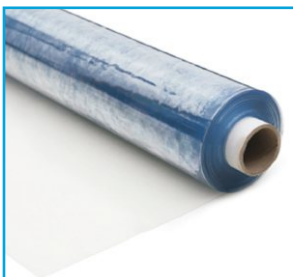


- Item no.: SK-8C-T
- Material: PVC
- Size: 1.37*30M
- Thickness: 0.25-2.0mm
- Color: Clear
- Surface resistance: 10e6-10e9
- Customization: ROHS 2.0
- Application: barrier wall, curtain or cover for ESD sensitive environment

ESD Mat



- Item no.: SK-811
- Material: nature rubber, nitrile rubber
- Thickness: 1.8; 2mm
- Size: 1*10m/roll; 1.2*10m/roll
- Color: Green, blue, grey
- Finish: shiny or matt
- Surface Resistance: 10e6-10e9
- Bottom Layer Resistance: 10e3-10e5
- Customization: ROHS 2.0
- Application: Electronics Factory, Pharmaceutical factory, Chemical plant, Clean room, Laboratory

Aluminum Composite Panel

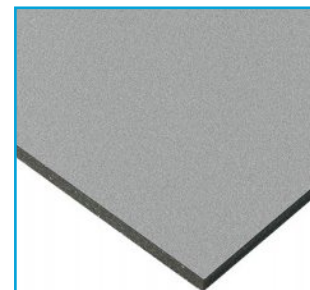


- Item no.: SK-ACP
- Raw Materials
- Aluminum base material: high strength aluminum alloy sheet
- Core: non-toxic low-density polyethylene (LDPE) core
- Surface: PVDF Kynar coating
- Size: 2.49*1.25m, 4.98*1.25m or customized
- Thickness: 3-6mm
- Color: Flash Silver, Silver Grey, Bright Black Brushed Silver
- Application: Decoration of curtain wall, interior and exterior wall and can also be used for the reconstruction of old buildings, as the surface layer of counters, furniture, internal and external walls of vehicles, etc

Melamine Wood Sheet




- Item no.: SK-MW
- Material: Solid wood core + Bottom layer paper + Decorative paper + Surface film
- Color: Black, Rosewood, Red oak
- Size: 1.22*2.44m or customized
- Thickness: 1-36mm
- Application: Decoration of interior buildings and various furniture and cabinets

ESD PVC Grid Curtain

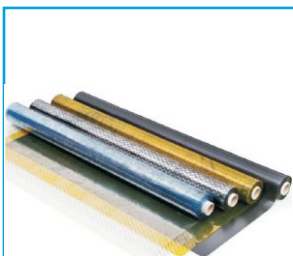

- Item no.: SK-8C-G
- Material: PVC
- Size: 1.37*30M
- Thickness: 0.25-2.0mm
- Color: Grid
- Surface resistance: 10e6-10e9
- Customization: ROHS 2.0
- Application: barrier wall, curtain or cover for ESD sensitive environment

ESD Anti-fatigue ball Mat

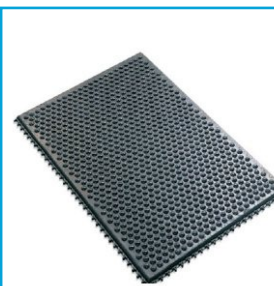


- Item no.: SK-8B
- Material: Rubber
- Normal Size: 600*450mm, 600*900mm, with lock, without lock
- Thickness: 13mm
- Color: Black
- Surface Resistance: 10e6-10e9
- Application: Antistatic+ anti-fatigue floor use

MDF Sheet




- Item no.: SK-MDF
- Material: Woodfiber
- Size: 1220*2440mm or 915*2135mm or customized
- Thickness: 2-25mm
- Color: Origin
- Surface finish: sanding/matt/glossy satin/embossed
- Application: Furniture industry building decoration industry audio equipment billboards-outdoor signs display tables, ping-pong tables sculptures models and so on

HDPE Sheet

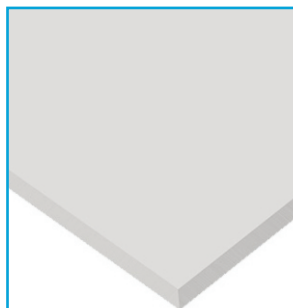


- Item no.: SK-HDPE
- Material: HDPE
- Size: 1220*2440mm or customized
- Thickness: 1/8", 1/4", 3/8", 1/2"
- Color: Black, white, green, etc.
- Surface finish: Plain/matt/embossed textures
- Application: Chemical, electric power and engineering plastics in machinery and other equipment

ESD Acrylic Sheet

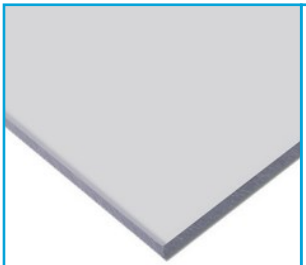


- Item no.: SK-EAC
- Size: 1.22*2.44m or customized
- Thickness: 3/4/5/6/8/10mm
- Surface resistance: 10e6-10e8
- Light Transmittance: 93%
- Refractive Index: 1.49
- Heat Distortion Temperature: 100°C
- Thermal Forming Temperature: 140°C-180°C
- Coefficient of Linear Thermal Expansion: 6x 10⁻⁵cm/cm/°C

Acrylic Sheet

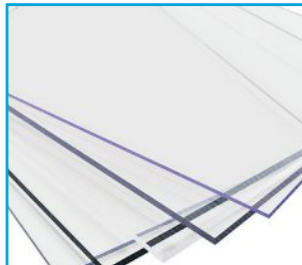

- Item no.: SK-AC
- Size: 1.22*2.44m or customized
- Thickness: 3/4/5/6/8/10mm
- Light Transmittance: 93%
- Refractive Index: 1.49
- Heat Distortion Temperature: 100°C
- Thermal Forming Temperature: 140°C-180°C
- Coefficient of Linear Thermal Expansion: 6x 10⁻⁵cm/cm/°C

ESD UHMWPE Sheet

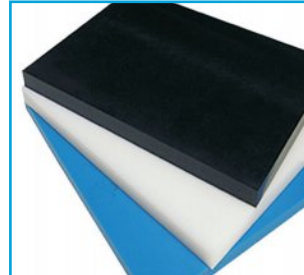


- Item no.: SK-EUP
- Material: UPE
- Size: 1.22*3.08m or customized
- Thickness: 1/8ht, 1/4, 3/8H, 1J2H
- Color: Black, white, blue, etc
- Surface resistance: 10e6-10e8
- Application: Textile, paper making, packaging transportation, machinery, chemical industry mining, petroleum, agriculture, construction electricity, food, medical treatment, sports and other fields

Nylon sheet




- Item no.: SK-NY
- Material: PA, 100% virgin material
- Size: 1.22*2.44m or customized
- Thickness: 6-80mm
- Color: White
- Application: Making wear-resisting parts, transmission structure parts, household electrical parts, automobile parts, screw preventing machinery parts, chemical machinery parts, chemical equipment.

ESD Polycarbonate Sheet

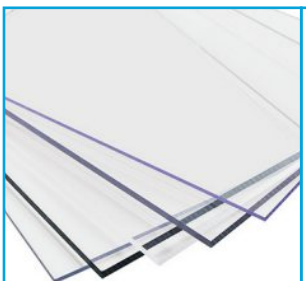


- Item no.: SK-EPC
- Size: 1.22*2.44m or customized
- Thickness: 3mm/5mm/6mm, etc
- Surface resistance: 10e6-10e8
- Light Transmittance: 89%
- Refractive Index: 1.586
- Drying Temperature: 120°C
- Hopper Temperature: 60-80°C
- Rear Temperature: 270°C-300°C

Polycarbonate Sheet

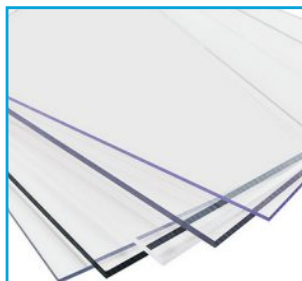


- Item no.: SK-PC
- Size: 1.22*2.44m or customized
- Thickness: 3mm/5mm/6mm, etc
- Light Transmittance: 89%
- Refractive Index: 1.586
- Drying Temperature: 120°C
- Hopper Temperature: 60-80°C
- Rear Temperature: 270°C-300°C

Polypropylene Sheet

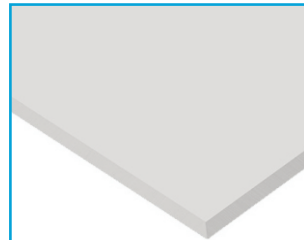


- Item no.: SK-PP
- Material: Polypropylene
- Size: 1.22*2.44m or customized
- Thickness: 1/4" or customized
- Color: White
- Application: Environmental protection equipment waste water, waste gas discharge equipment washing tower, clean room, semiconductor plant and related industrial equipment, punching plate punching pad, is also the first choice of plastic water tank material

ABS Sheet

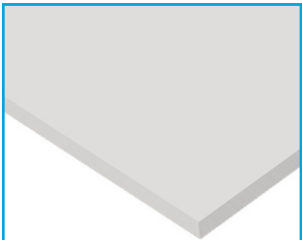

- Item no.: SK-ABS
- Material: ABS
- Size: 1.22*2.44m or customized
- Thickness: 1/8", 1/4" or customized
- Application: Food industrial parts, building model hand board making phase forming electronic industrial parts, refrigerator refrigeration industry electronic and electrical field, pharmaceutical industry etc

Rigid PVC Sheet

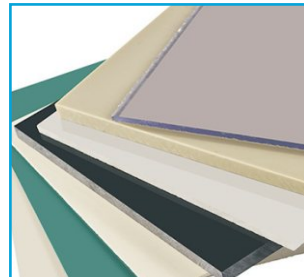

- Item no.: SK-PVC
- Material: PVC
- Size: 1.22*2.44m or customized
- Thickness: 3mm, 6mm or customized
- Color: Black, gray, white, etc
- Density: 1.55-1.6g/cm³
- Application: Chemical, petroleum electroplating water purification treatment equipment, environmental protection equipment, mining, medicine electronics, communication and decoration industries

Rigid PVC Sheet




- Item no.: SK-PSF
- Material: PVC
- Size: 1.22*2.44m or customized
- Thickness: 3mm, 6mm or customized
- Color: Black, gray, white, etc
- Density: 0.85 g/cm³
- Application: Interior decoration board, building exterior wall board, office residence, public space building compartment, commercial decoration frame, clean room board, etc

Polycarbonate Hollow Sheet



- Item no.: SK-PH
- Material: PC
- Size: 2.1*6m or customized
- Thickness: 4/6/8/12mm, etc
- Application: Industrial plants, public buildings, civil buildings, modern commercial buildings, modern agriculture safety lighting materials

ESD/Conductive Corrugated Sheet

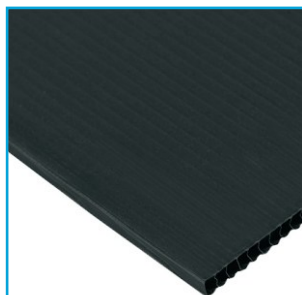

- Item no.: SK-ECR
- Material: PP
- Size: 1.22*2.44m or customized
- Thickness: 2-8mm, etc
- Weight: 400g-1800g
- Color: Black
- Surface resistance: 10e3-10e8
- Application: Building materials, automotive manufacturing, medical devices, aerospace, packaging field, electronic optical lens industries

Multi-plywood



- Item no.: SK-MPD
- Main material: Poplar
- Multi-plywood
- Main material: Poplar
- Size: 1.22*2.44m or customized
- Thickness: 9mm, 15mm, 18mm, etc
- Surface treatment: Polished/Non-Polished
- Application: Decorate the bottom plate of the panel, the back plate of the panel, furniture and other wood products.

Particle Board



- Item no.: SK-PB
- Main material: Poplar
- Size: 1.22*2.44m or customized
- Thickness: 9mm, 15mm, 18mm, etc
- Density: 700kg/m³ 680kg/m³
- Surface treatment: Matt smooth, grain embossed, glossy and etc.
- Application: Insulation, sound absorption or ceiling, making common furniture, etc.

